

TREE PER PLAN

#5 "CHAINLOCK" PLASTIC TREE TIES AT  $\frac{1}{3}$  TO  $\frac{1}{2}$  HEIGHT OF TREE, TYP.

2" DIA. FIR STAKES  
-DRIVE INTO FIRM NATIVE SOIL, 3'-0" MIN., TYP.

GRADE AT WHICH TREE GREW IN NURSERY  
-DO NOT BURY ROOT CROWN


2" COMPACTED DEPTH MULCH  
-KEEP 6" AWAY FROM BASE OF TRUNK, TYP.

FOLD BURLAP AWAY FROM TOP HALF OF ROOT BALL AFTER TREE IS SET INTO POSITION  
-COMPLETELY REMOVE ALL TWINE AND WIRING, TYP.


SCARIFY SIDES OF PLANTING HOLE, TYP.

NATIVE SOIL BACKFILL  
-INCORPORATE UP TO 25% COMPOST AMENDMENT IN FAST DRAINING OR ORGANIC DEFICIENT SOILS

UNDISTURBED NATIVE SOIL

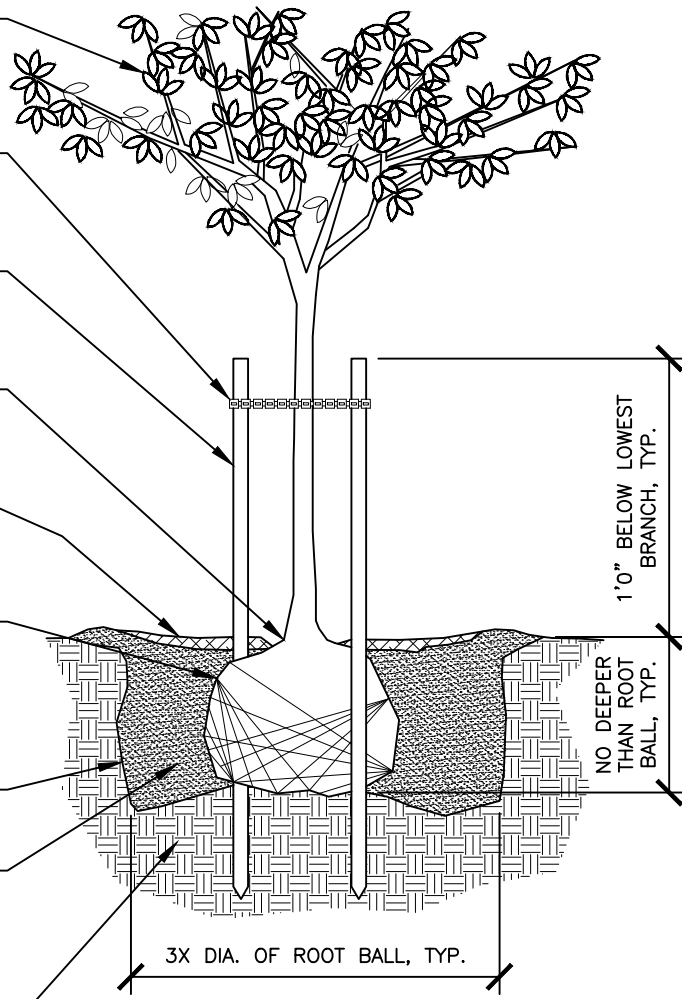

PROVIDE 2 SPARE LINKS MIN. TO ALLOW FOR TENSION ADJUSTMENT



POSITION TIE WITH  $\frac{1}{2}$ " MIN. CLEARANCE ON ALL SIDES OF TRUNK

STAKING PLAN

NOTES:

1. CONTAINERIZED TREES: REMOVE CONTAINER, ROUGH UP ROOT BALL AND SPREAD ROOTS TO PROMOTE ELONGATION INTO NATIVE SOIL.
2. STAKING IS REQUIRED FOR TREES 5'-0" OR GREATER IN HEIGHT UNLESS OTHERWISE SPECIFIED.
3. ALTERNATIVE STAKING METHODS MAY BE ACCEPTED WITH APPROVAL OF BELLEVUE PARKS.
4. 3 STAKES MAY BE REQUIRED FOR TREES WITH 3" CALIPER OR GREATER.
5. STAKES SHALL BE REMOVED NO LATER THAN 1 YEAR AFTER TREE PLANTING UNLESS OTHERWISE SPECIFIED.
6. TREES SHALL BE INSPECTED AND APPROVED BY BELLEVUE PARKS PRIOR TO INSTALLATION.



City of Bellevue

TITLE:

PLANTING - TREE

DRAWING #:	PK-IM-03A
SCALE:	N.T.S.
REVISION DATE:	12-2018
DEPARTMENT:	PARKS