


Plant Schedule


| Botanical Name | Common Name | Size | Notes | Quantity (this sheet) |
|--------------------------------|----------------------------|------|-------|-----------------------|
| TREES | | | | |
| Acer circinatum | Vine Maple | | | |
| Ginkgo biloba 'Autumn Gold' | Maidenhair Tree | | | |
| Nyssa sylvatica | Black Gum | | | |
| Stewartia pseudocamellia | Japanese Stewartia | | | |
| SHRUBS | | | | |
| Adiantum venustum | Himalayan Maidenhair Fern | | | |
| Arbutus unedo 'Compacta' | Compact Strawberry Tree | | | |
| Aucuba japonica 'Serratifolia' | Sawtoothed Japanese Aucuba | | | |
| Hydrangea aspera 'Macrophylla' | Big-leaf Chinese Hydrangea | | | |
| Mahonia x media 'Winter Sun' | Winter Sun Mahonia | | | |
| Mahonia nervosa | Cascade Oregon Grape | | | |
| Polystichum polyblepharum | Japanese Tassel Fern | | | |
| Rhododendron yedense | Korean Azalea | | | |
| Rhododendron 'Hardy Gardenia' | Hardy Gardenia Azalea | | | |
| Sarcococca confusa | Fragrant Sarcococca | | | |
| EDIBLES | | | | |
| Aronia melanocarpa | Black Chokeberry | | | |
| Fragaria vesca | Woodland Strawberry | | | |
| Lonicera caerulea | Blue-berried Honeysuckle | | | |
| Ribes uva crispia | Gooseberry | | | |
| Rubus chamaemorus | Cloudberry | | | |
| Sambucus caerulea | Caerulea Blue Elderberry | | | |
| Vaccinium ovatum | Blueberry | | | |
| Vaccinium vitis-idaea | Lingonberry | | | |
| PERENNIALS | | | | |
| Iris foetidissima | Coral Iris | | | |
| Disporopsis pernyi | Evergreen Solomon's Seal | | | |
| Hosta 'August Moon' | Plantain Lily | | | |
| Hosta tokudama 'Aureonebulosa' | Plantain Lily | | | |
| GROUNDCOVERS | | | | |
| Epimedium x rubrum | Horny Goat Weed | | | |
| Fragaria chiloensis | Native Beach Strawberry | | | |
| NATIVES | | | | |
| Achlys triphylla | Vanilla Leaf | | | |
| Ceanothus americanus | Small Camas | | | |
| Dicentra formosa | Bleeding Heart | | | |
| Mahonia nervosa | Cascades Mahonia | | | |
| Maianthemum dilatatum | False Lily-of-the-valley | | | |
| Philadelphus lewisii | Mock Orange | | | |
| Polystichum munitum | Sword Fern | | | |
| Physocarpus opulifolius | Pacific Ninebark | | | |
| Rhamnus purshiana | Cascara | | | |
| Ribes sanguineum | Flowering Red Currant | | | |
| Sambucus racemosa | Red Elderberry | | | |
| Tiarella cordifolia | Foamflower | | | |

Planting Notes


- The Contractor is responsible for verifying the locations of all underground utilities (including irrigation) prior to commencement of work; and, to protect said utilities from damage during demolition, trenching and plant installation.
- Conflicts between approved planting plans and existing field conditions shall be identified to the Owner prior to planting.
- Proposals for plant substitutions, location adjustments, soil amendments or any variations from the approved plans shall require prior written approval of the Landscape Architect.
- Soils located in planting areas that have been compacted to a density greater than that penetrable with a hand shovel (approx. 85%), shall be loosened to increase aeration for a minimum depth of 12 inches for the entire area of the compacted soils utilized for landscape purposes.
- The Owner, during construction, shall perform an on-site visual analysis of the soils. Verification of the need for additional soil amendments will be made at that time. Recommended amendments shall be applied prior to planting.
- Use of fertilizer, organic or synthetic slow-release type, and pesticides of any kind shall only be permitted by the Owner. Permitted applications of pesticides shall be applied by licensed applicators only.
- All plant material shall meet current American Association of Nurseryman Standards for Nursery Stock (ANSI 260.1) requirements.
- The Owner and the Landscape Architect shall inspect all plant material at the time of delivery. Allow 48 hours minimum notification for inspection request. Plant material that has been approved for installation shall be planted within 24 hours. Installation shall not be conducted under adverse weather conditions without prior approval of the Owner. Plant material that cannot be planted within one day following arrival shall be heeled-in, kept moist and protected at all times from extreme weather conditions. Plants shall be stored at the sole responsibility of the Contractor.
- Tree pits shall be a minimum of three times (3x) the diameter of the tree's root mass. Additional aeration may be required as directed by the Landscape Architect.
- Trees shall be symmetrical and uniform in appearance, size and structure.
- Tree setbacks from pavement shall be consistent with adopted City of Bellevue Street Tree Standards, and meet the following general requirements unless otherwise directed by the Owner:
 - Trees will not be planted in locations that could lead to roots damaging street or curbing.
- Plant materials shall be guaranteed for a period of one year unless specified otherwise in Project Manual. Plant material that has lost more than 30 percent of its normal foliage shall be replaced as directed by the Landscape Architect.
- Keep all areas of work clean, neat and orderly at all times. All paved areas are to be cleaned following planting and maintenance activities.
- Contractor shall provide protection for all persons and property, work in progress, structures, utilities, walks and drives, during the installation of landscape and irrigation work.
- Layout is based on information supplied by Owner and is not necessarily complete or correct. Contractor shall notify Owner immediately of any discrepancy or upon disclosure of any unforeseen or undescribed condition for further instruction by Owner.

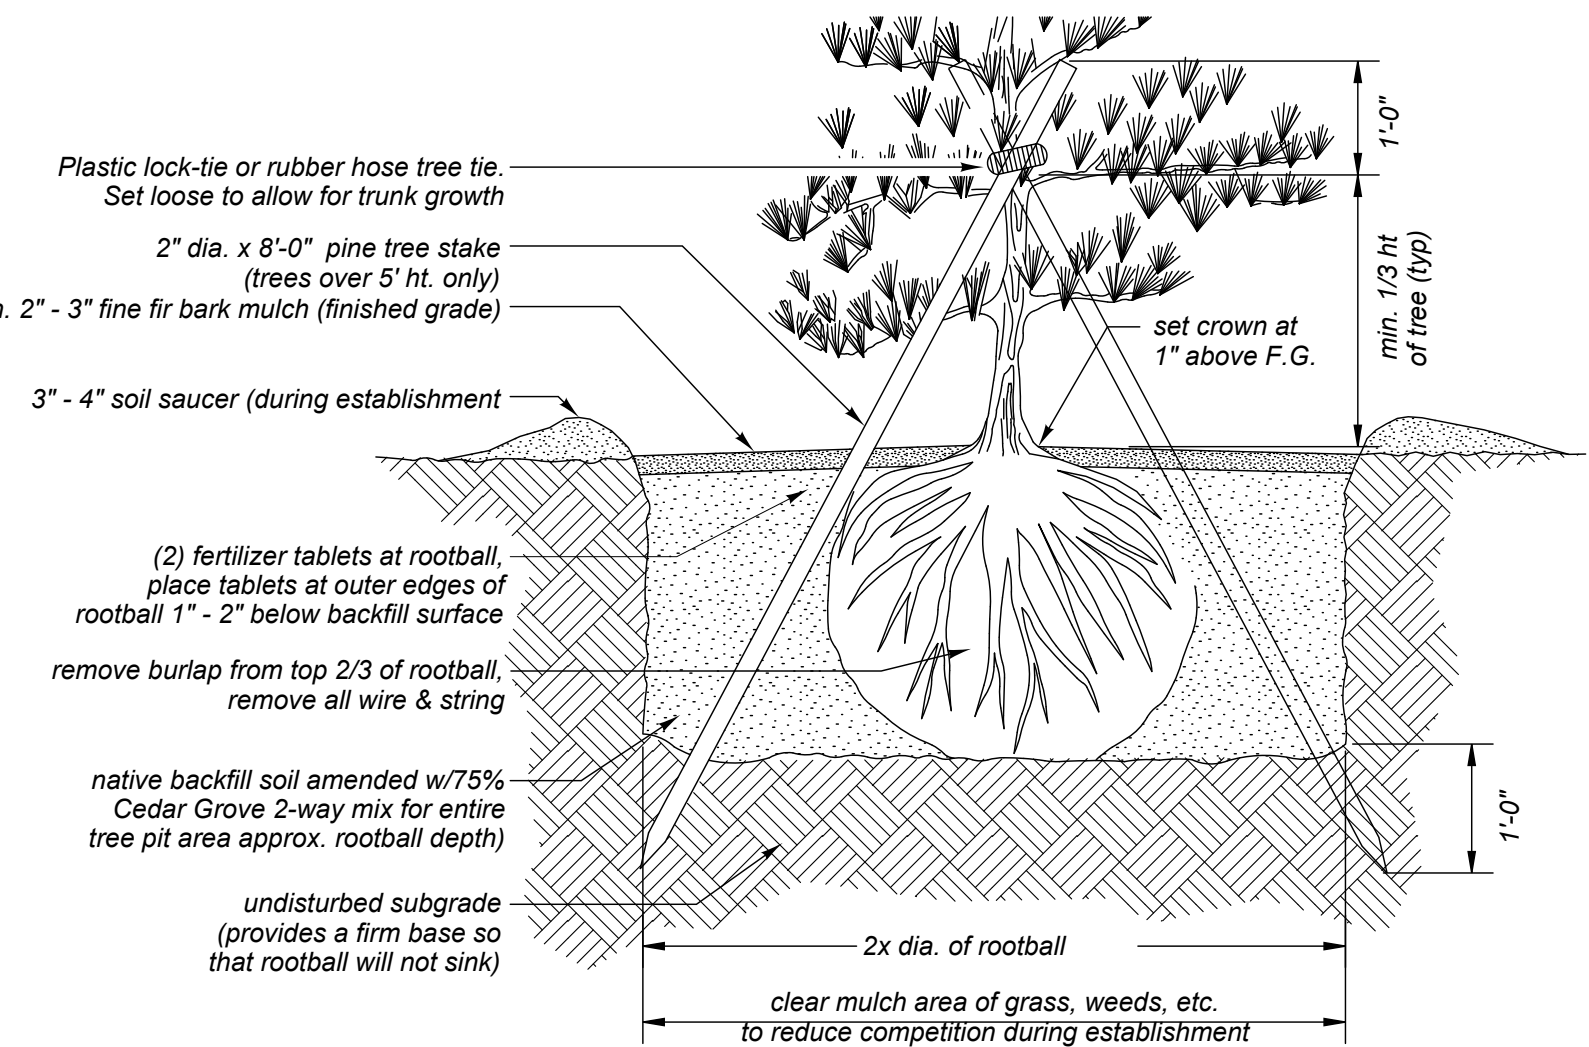


Evergreen Tree Planting no scale

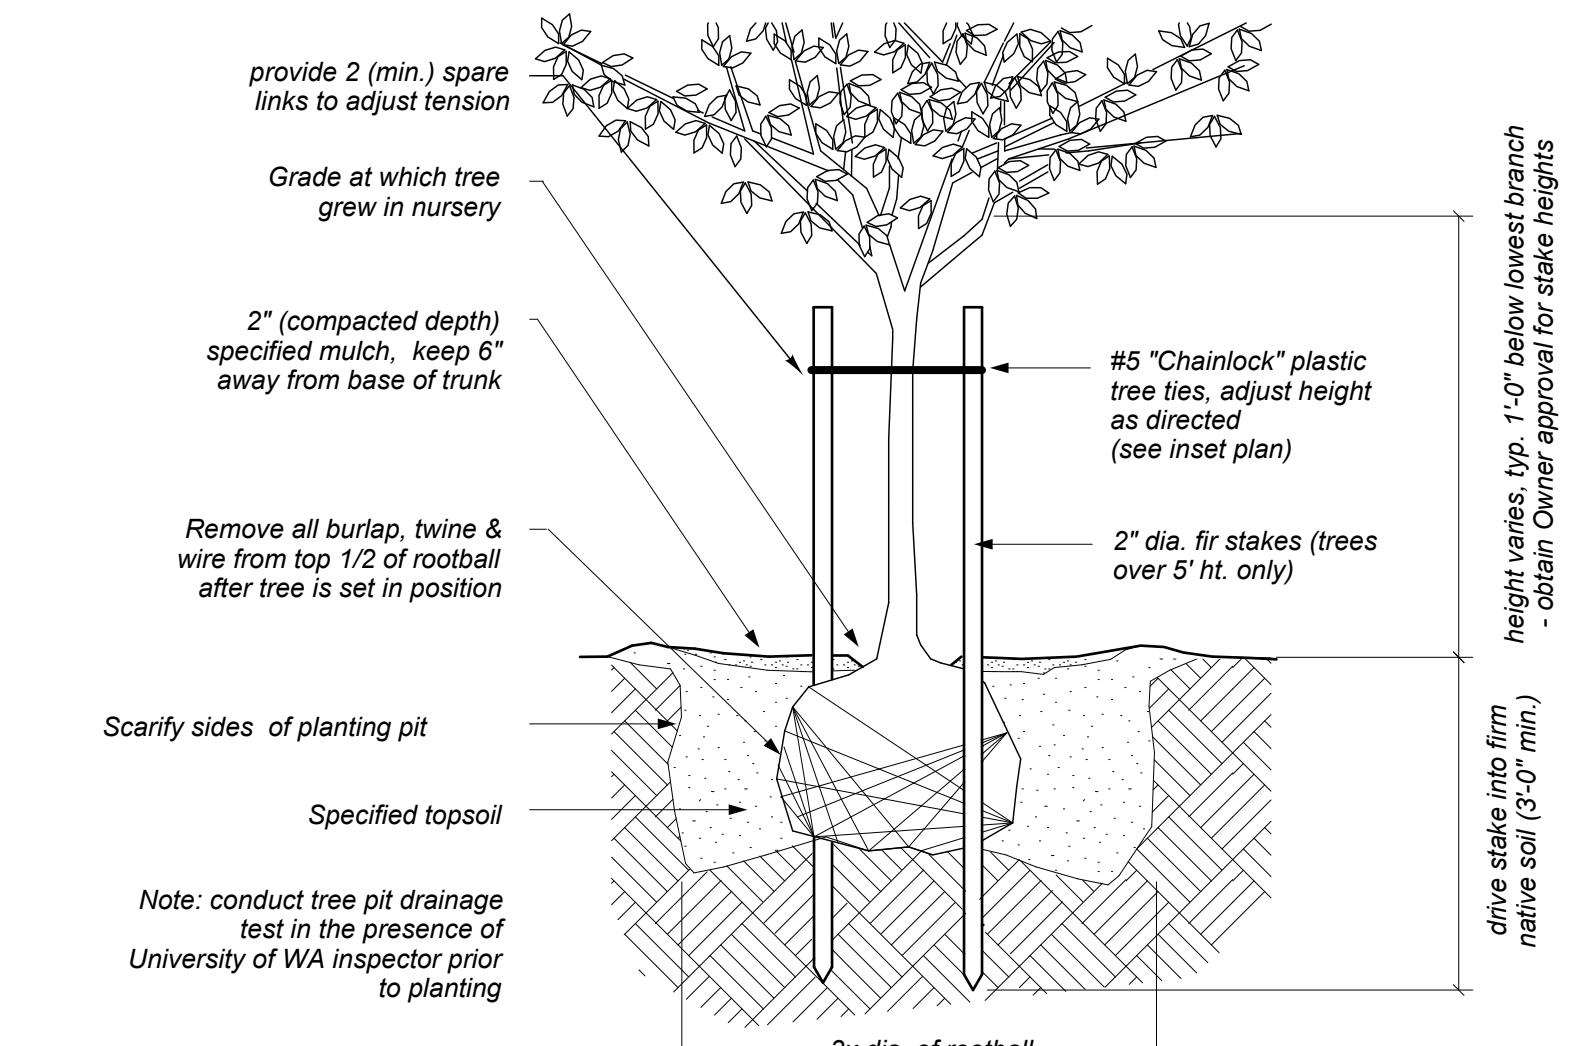

Deciduous Tree Planting no scale

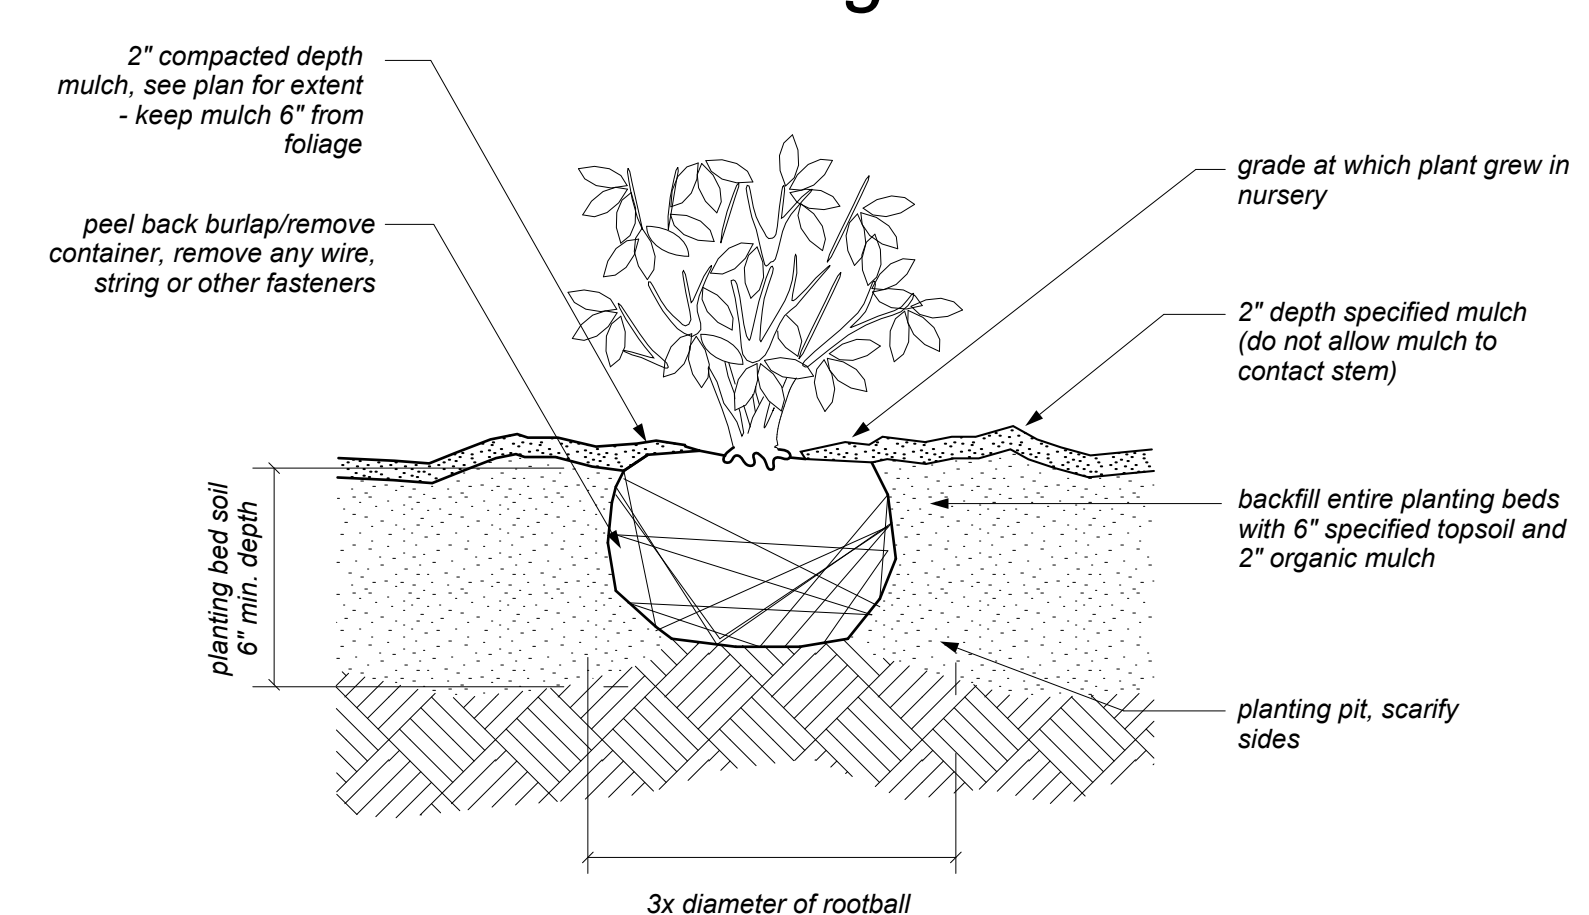

Groundcover/Shrub Planting no scale

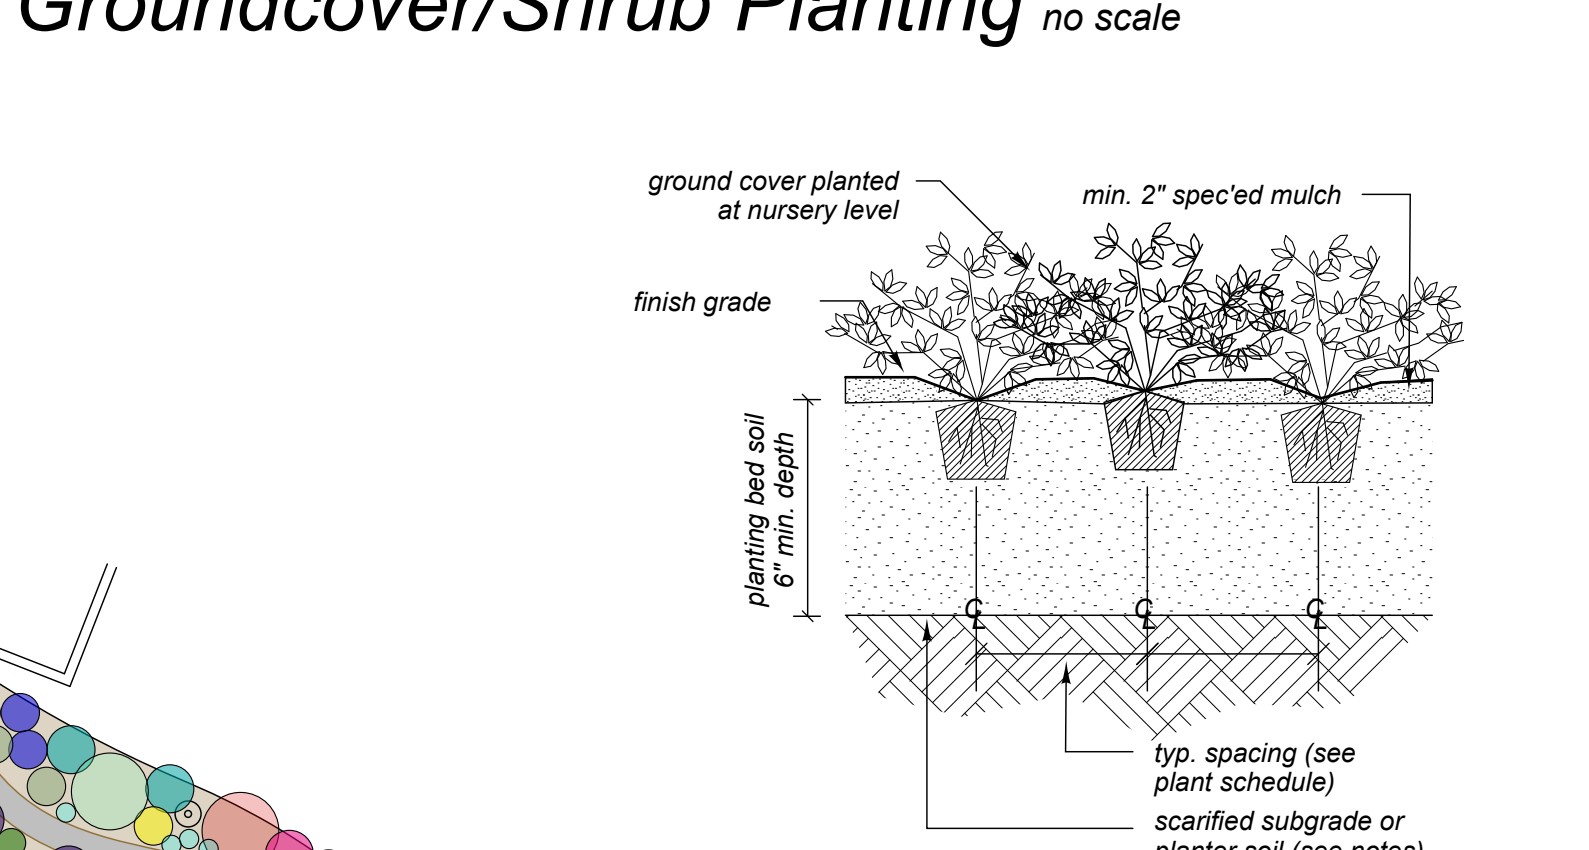

GC Planting no scale

State Of Washington
Licensed
Landscape Architect
Richard B. Van De Mark
Certificate No. 481
CLARK CERTIFIED
LANDSCAPE ARCHITECT

RVLA, inc., p.s.
33109 SE 110th street
Issaquah, WA 98027
phone • 425 222-7645
fax • 425 222-7642
e-mail • rvla@comcast.net

Issue:
Revision Date Description
Plot Date: 4/2/12 5:11 PM
1 inch equals 10 feet (drawing has not been printed at 100% scale)

Woodridge Neighborhood Entry
Landscape Renovation
119th Avenue SE at SE 8th Street - Bellevue, WA
CITY OF BELLEVUE
P.O. BOX 30012 - BELLEVUE, WASHINGTON 98009-0012 • PHONE 425-452-6855 FAX 425-452-6047
Park Department - Resource Management Division



Contents:
Planting Plan

Sheet: