

10' LONG ROOT BARRIER AT EDGE OF PLANTER CENTERED ON TREE PER COB STD. DWG. SW-130-1, TYP.

STAKING PER COB STD. DWG. PK-IM-03A. APPLY 2" LAYER OF ORGANIC MULCH TO OUTSIDE EDGE OF TREE STAKES. MULCH SHALL BE KEPT 6" AWAY FROM TRUNK, TYP.

ROW TREE PLANTING PER COB STD. DWG. PK-IM-07B


USE TEMPORARY FORM TO FULL DEPTH. REMOVE AFTER SETTING.

IRRIGATION LINE AND TREE BUBBLER (ROOT WATERING SYSTEM)

FLEXIBLE POROUS SURFACING, COLOR PER PLANS, TYP.

PLAN

LENGTH VARIES

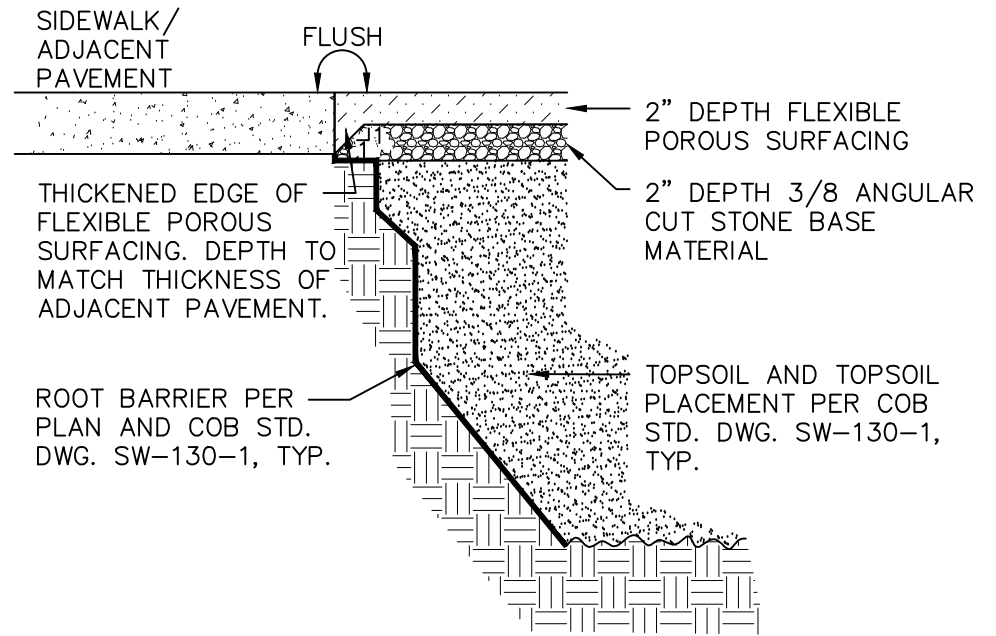

SECTION A

EXISTING TREE NOTES:

1. WHEN APPLYING FLEXIBLE POROUS SURFACING AT EXISTING TREES, DO NOT AMEND SOIL WITHIN TREE DRIP ZONE. THE CONTRACTOR MUST NOTIFY THE CITY OF BELLEVUE 5 WORKING DAYS PRIOR TO PLACEMENT OF FLEXIBLE POROUS SURFACING AND BASE MATERIAL AT EXISTING TREES. PLACEMENT OF FLEXIBLE POROUS SURFACING AND BASE MATERIAL AT EXISTING TREES MUST BE AS DIRECTED BY THE CITY OF BELLEVUE.



City of Bellevue

TITLE:

FLEXIBLE POROUS SURFACING AT TREE PLANTER

DRAWING #:	PK-IM-07C
SCALE:	N.T.S.
REVISION DATE:	08-2020
DEPARTMENT:	PARKS



Standard detail revised with support of King Conservation District