



TOP VIEW




BOTTOM VIEW EXAMPLE  
(SEE NOTE 2)




SECTION A-A

TYPE 1

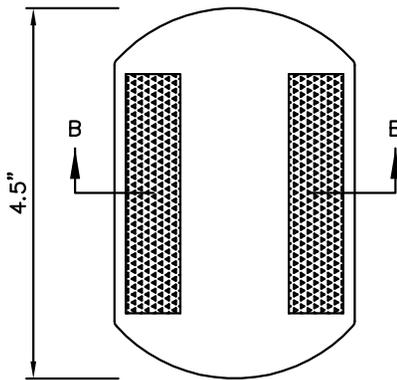

PLAN

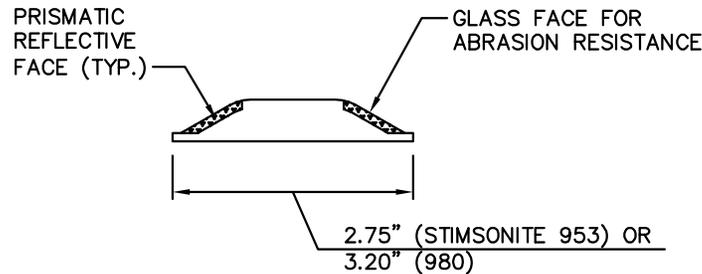

SECTION B-B

TYPE 2

NOTES:

1. RAISED PAVEMENT MARKER TYPE 1 SHALL BE ALPINE PRODUCTS MODEL ANR-Y, STIMSONITE MODEL B10 OR APPROVED EQUAL. MARKERS SHALL BE MOLDED OF A HIGH IMPACT, RECYCLED ACRYLONITRILE BUTADIENE STYRENE (ABS), CONFORMING TO ASTM SPEC DI 78868.
2. TYPE 1 MARKER BOTTOM SHALL ALLOW UPWARD FLOW OF ADHESIVE AND VENTING TO PREVENT AIR ENTRAPMENT.
3. RAISED PAVEMENT MARKERS TYPE 2 SHALL BE STIMSONITE 953 OR 980.
4. SUBSTITUTE PAVEMENT MARKERS SHALL NOT BE ACCEPTED WITHOUT WRITTEN APPROVAL BY THE ENGINEER, PRIOR TO INSTALLATION.
5. ALL MARKERS INSTALLED ON CEMENT CONCRETE PAVEMENT SHALL BE INSTALLED WITH AN EAS-60 TWO PART EPOXY. SEE COB SPECIFICATION SECTION 8-09.
6. ALL MARKERS INSTALLED ON HMA PAVEMENTS SHALL BE INSTALLED WITH BITUMINOUS ADHESIVE, CRAFCO STANDARD PAVEMENT MARKER ADHESIVE. SEE COB SPECIFICATION SECTION 8-09.



City of  
Bellevue

RAISED PAVEMENT MARKER DETAILS

DRAWING NUMBER	TE-5
SCALE	NONE
REVISION DATE	01/15
DEPARTMENT	TRANS