



REDUCED
SECTION A-A
(SEE NOTE 5)

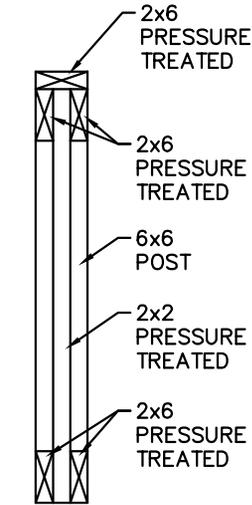

SECTION A-A

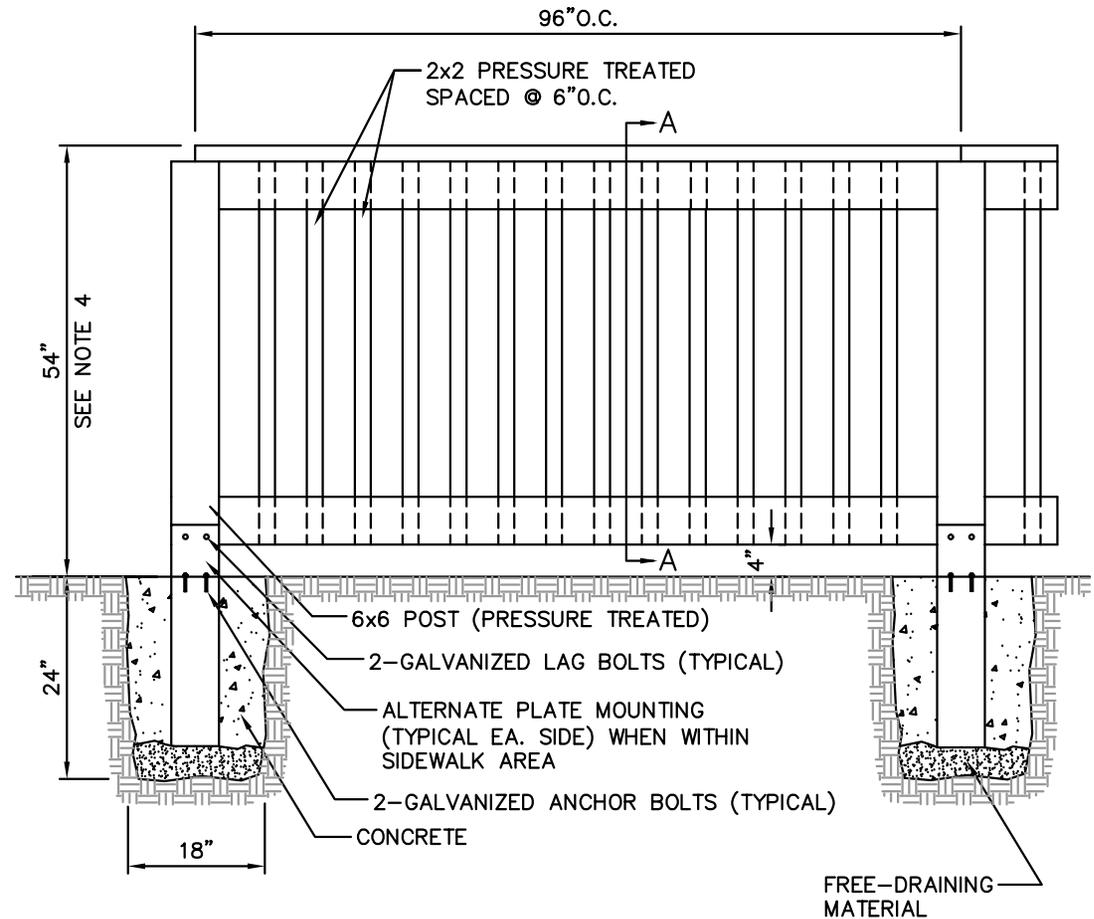

ELEVATION VIEW

NOTES:

1. USE ON TRAILS OR TO UPGRADE EXISTING WOOD RAILING.
2. FOR NEW INSTALLATIONS IN SIDEWALK, METAL RAILING IS PREFERRED (SEE DWG. TE-34).
3. AVOID PLACING IN SIGHT LINES (SEE DWGS. TE-1,2,&3).
4. 42" HEIGHT MAY BE USED ONLY UPON APPROVAL OF THE ENGINEER.
5. USE REDUCED CROSS SECTION ONLY UPON APPROVAL OF THE ENGINEER.
6. NAILING - TWO NAILS PER JOINT MINIMUM, WITH PENETRATION TO ADEQUATELY SECURE THE JOINT. NAILS MUST BE GALVANIZED.
7. SEE DESIGN STANDARD 13 FOR ADDITIONAL INFORMATION.



WOOD SAFETY RAILING

DRAWING NUMBER	TE-35
SCALE	NONE
REVISION DATE	01/15
DEPARTMENT	TRANS