

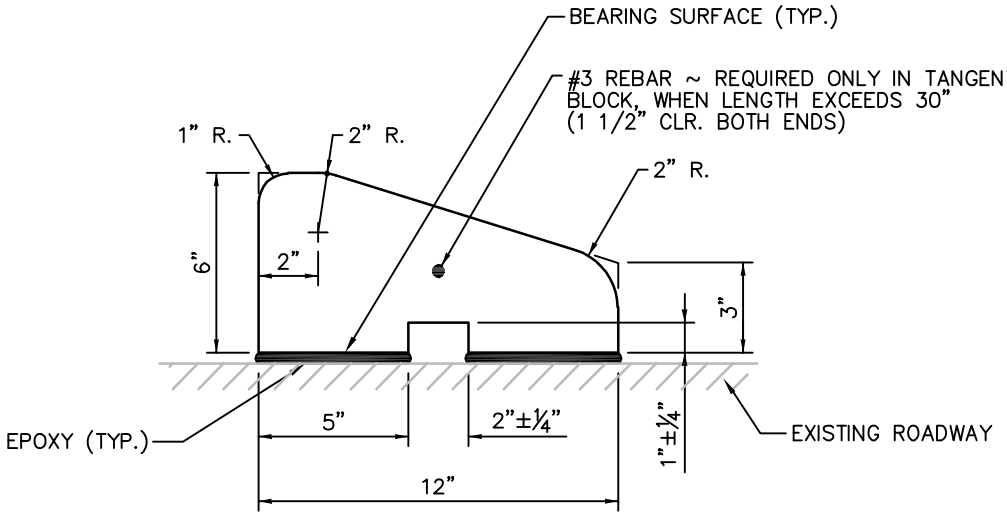


SLOPED MOUNTABLE CURB

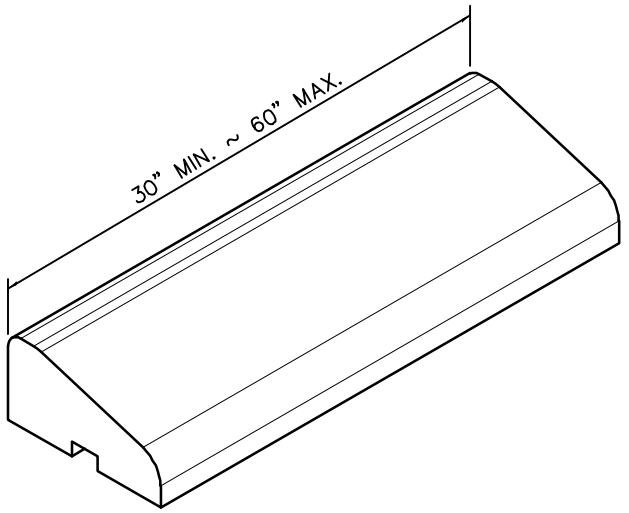

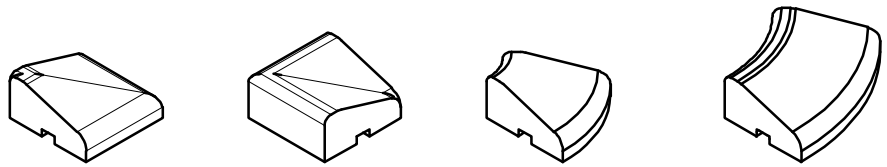

OUTSIDE CORNER BLOCK | INSIDE CORNER BLOCK | 18" RADIUS BLOCK | 30" RADIUS BLOCK

CORNER SEGMENTS

NOTES:

1. PRECAST TRAFFIC CURB SHALL BE INSTALLED WITH AN EAS-06 OR EAS-08 TWO PART EPOXY OR ULTRABOND 1 FROM ADHESIVES TECHNOLOGY CORP. SEE STD. DWG. CH-300-1.
2. EPOXY SHALL BE PLACED UNDER THE BEARING SURFACE OF THE PRECAST TRAFFIC CURB.
3. APPLY SUFFICIENT AMOUNT OF EPOXY TO ENSURE UNIFORM COVERAGE OF APPROXIMATELY ¼" ACROSS THE BEARING SURFACE. THE EPOXY SHALL SQUEEZE-OUT ALONG ALL EDGES.

City of Bellevue

PRECAST CONCRETE SLOPED MOUNTABLE CURB

DRAWING NUMBER	CH-160-1
SCALE	NONE
REVISION DATE	10/26
DEPARTMENT	TRANS