1. 8x8 (TRUE) REMOVABLE POST WITH SLIDE THROUGH STEEL BRACKET SET IN CONCRETE FOOTING
2. 8x8 (TRUE) FIXED POST SET IN CRUSHED GRAVEL FOOTING
3. 4x6 RAIL RECESSED INTO POSTS

NOTES:
1. SEE PK–TR–16A FOR DISMOUNT SECTION
2. ALL WOOD TO BE D.F. #2 OR BETTER, PT ACQ/CBA, OR APPROVED EQUAL

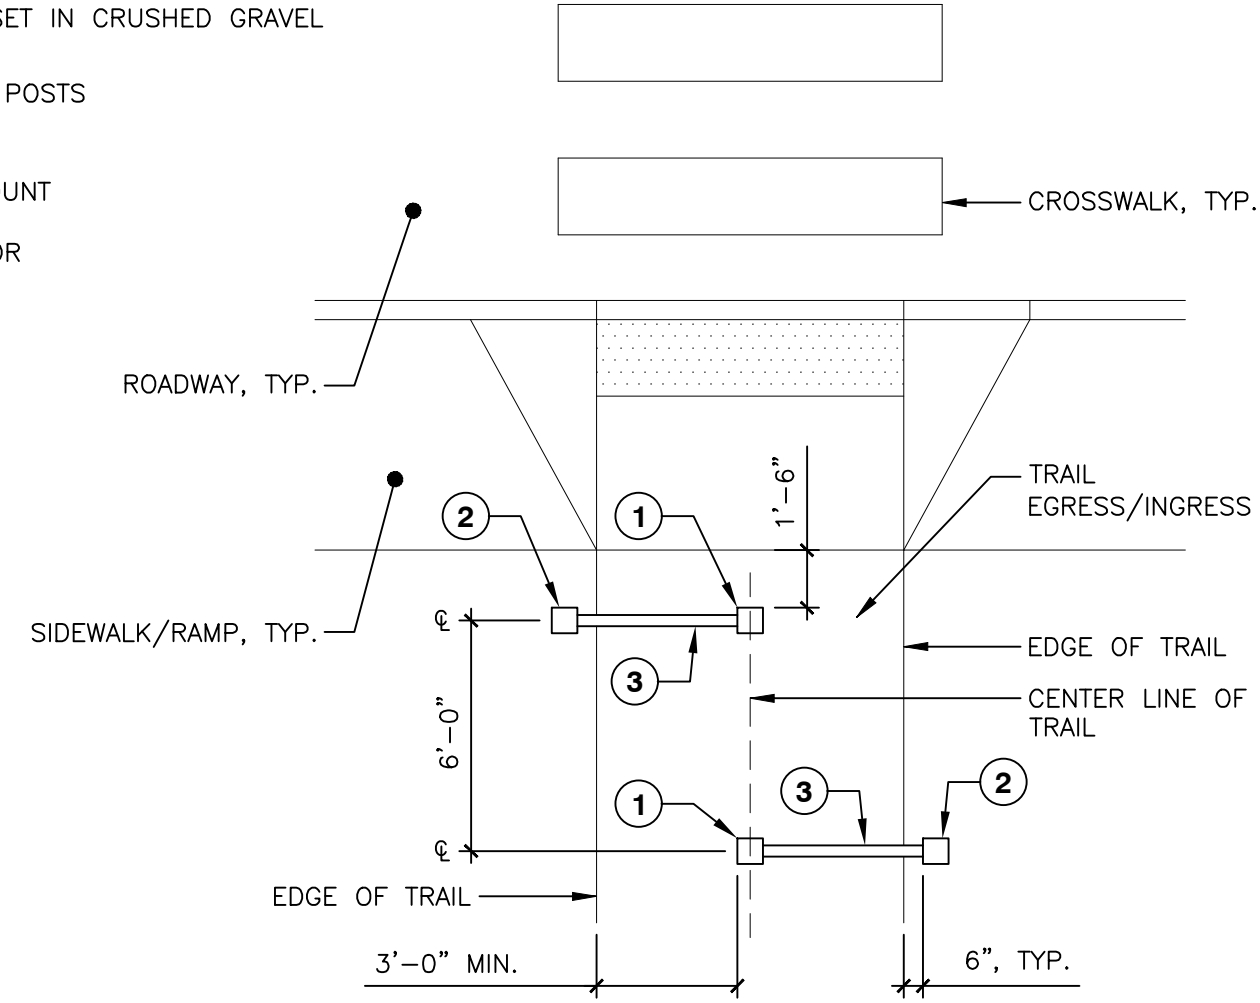

City of Bellevue

TITLE:

TRAIL - BOLLARD - BIKE DISMOUNT - LAYOUT

DRAWING #:	PK-TR-16B
SCALE:	N.T.S.
REVISION DATE:	04-2026
DEPARTMENT:	PARKS