


ROCK-LINED SHOULDER DITCH
IN FILL SECTION

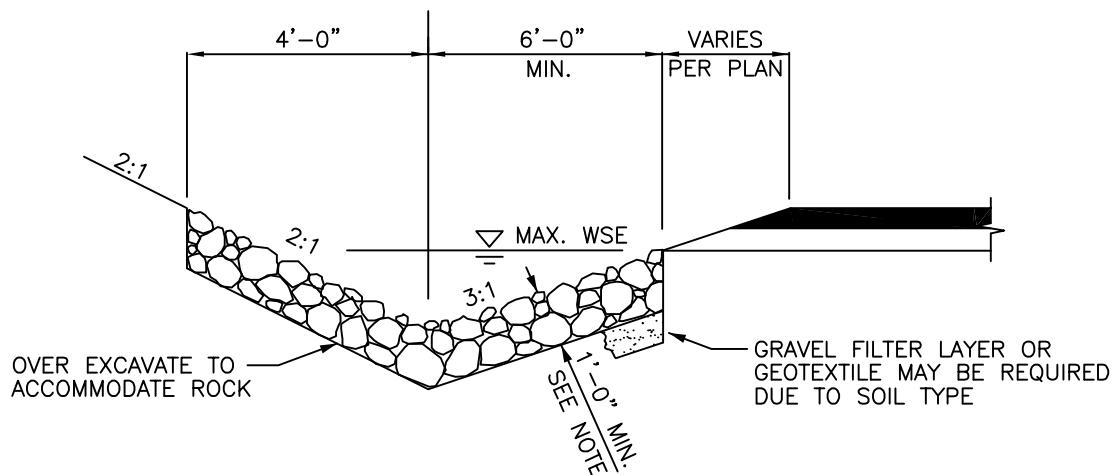

ROCK-LINED SHOULDER DITCH
IN CUT SECTION

NOTES:

1. ROCK LINED DITCHES TO BE USED WHEN FLOW VELOCITIES EXCEED 4 FPS.
2. ROCK SIZE AND DEPTH DEPENDENT ON FLOW VELOCITY. MINIMUM ROCK SIZE 2"-4" QUARRY SPALLS.

 City of Bellevue <small>WASHINGTON</small>	STORM AND SURFACE WATER UTILITY
	TITLE ROCK-LINED DITCHES