




## PLAN

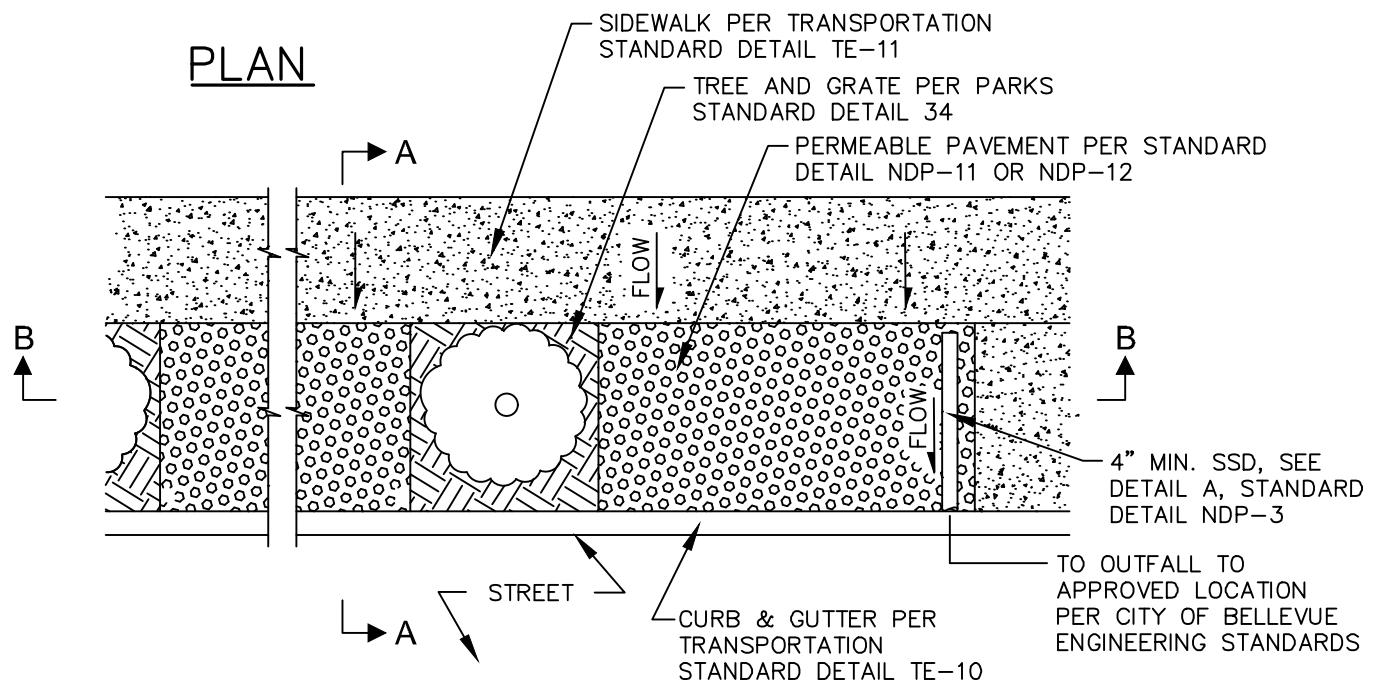

## SECTION A-A

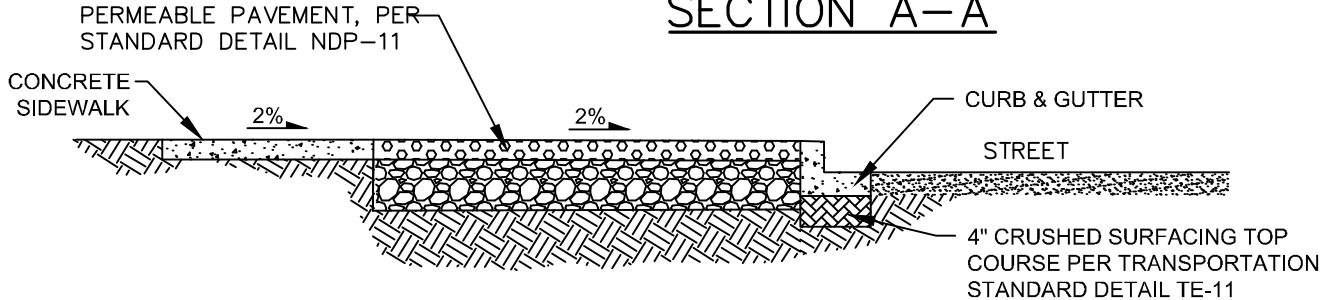

## SECTION B-B

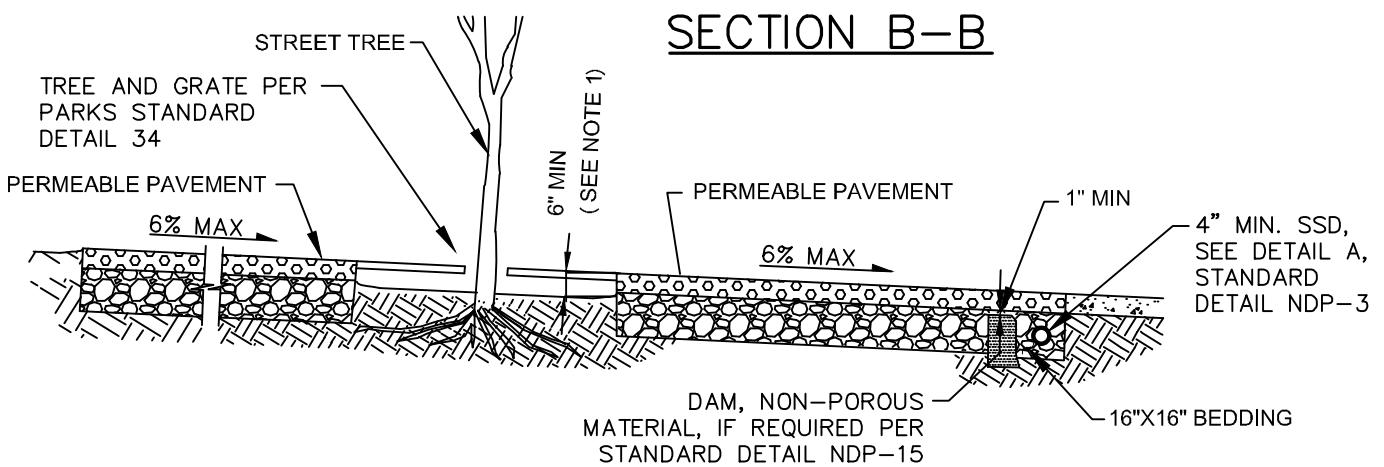

### NOTE:

1. 6" MIN. DEPTH IN THE TREE PIT APPLIES TO PERVERSIVE CEMENT CONCRETE SIDEWALK ONLY. IF OTHER PERMEABLE PAVER MATERIAL USED, NO MIN. DISTANCE REQUIRED.
2. ROOT BARRIER AS NECESSARY AS DIRECTED BY THE ENGINEER.



City of  
Bellevue

STORM AND SURFACE  
WATER UTILITIES

TITLE

PERMEABLE PAVEMENT SIDEWALK  
IN PLANTING STRIP

NO. NDP-13