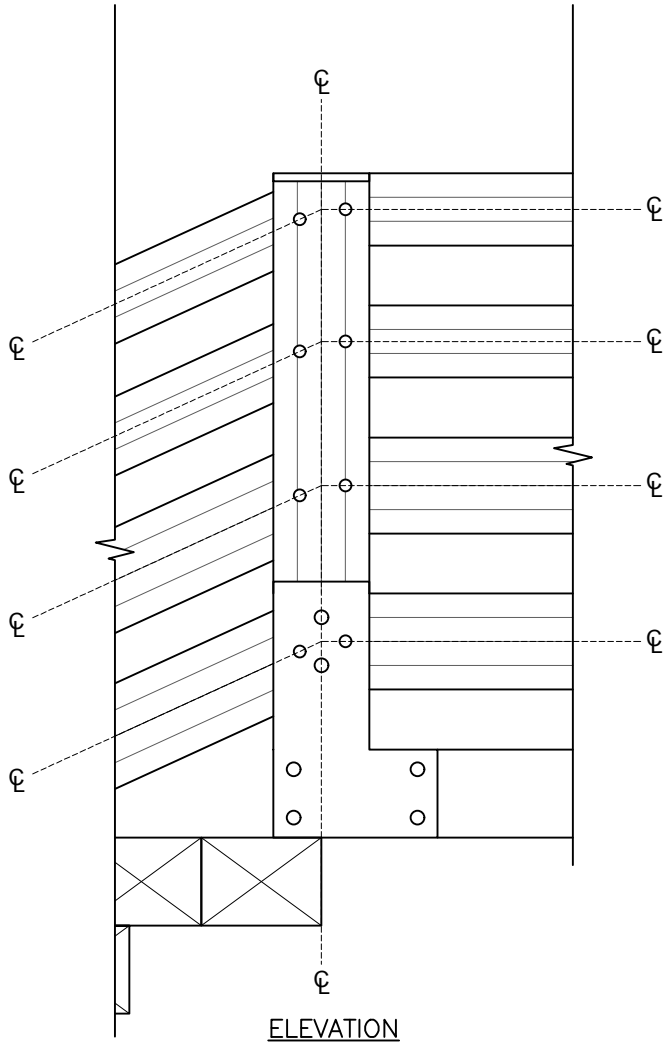

ELEVATION

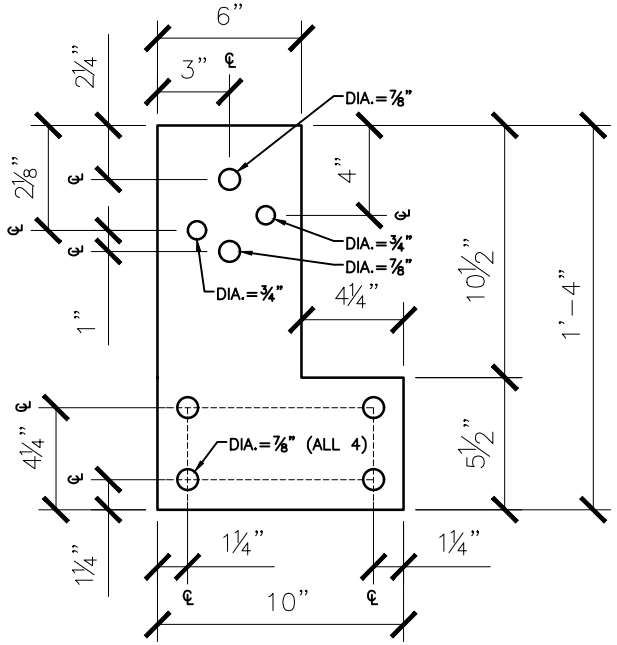

SIDE PLATE DIMENSIONS

NOTES:

1. SIDE PLATE SHALL BE ¼" HOT DIPPED GALV. STEEL.
2. ¾" HOLES TO RECEIVE ½" DIA. HEX BOLT FOR RAILING TO POST CONNECTION. ⅞" HOLES TO RECEIVE ¾" DIA. LAG BOLTS FOR PLATE TO STAIR TREAD AND POST CONNECTIONS.
3. USE 6⅝" LONG LAG BOLTS AT POSTS AND 12" LONG LAG BOLTS AT STAIR TREADS.
4. ALL BOLTS AND ASSOCIATED HARDWARE SHALL BE HOT DIPPED GALVANIZED.

City of Bellevue

TITLE:

COAL CREEK NATURAL AREA - TRAIL - TIMBER STAIRS - RAILING - CONNECTION AT TOP OF STAIRS

DRAWING #:	PK-CC-08E
SCALE:	N.T.S.
REVISION DATE:	12-2018
DEPARTMENT:	PARKS