


STANDARD SECTION

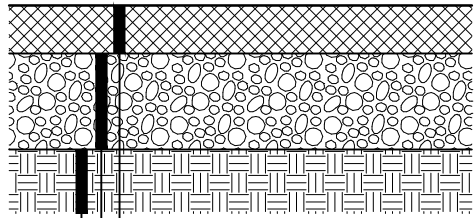


2-4" ASPHALT CONCRETE
PAVEMENT PER SPECIFICATIONS

6" MIN. BASE COURSE
MATERIAL COMPACTED TO
95% DENSITY

EXISTING COMPACTED
SUBGRADE

OVERLAY SECTION

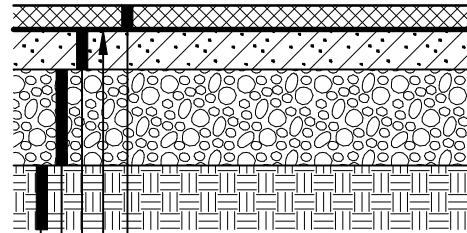

1.5" MIN. ASPHALT CONCRETE
PAVEMENT OVERLAY

OPTIONAL PETRO-MAT LAYER

SMOOTH EXISTING ACP LAYER

EXISTING COMPACTED BASE
COURSE MATERIAL

EXISTING COMPACTED SUBGRADE

NOTES:

1. ASPHALT CONCRETE MIX SHALL BE HMA CLASS "B" OR APPROVED EQUAL WITH INSTALLATION TEMPERATURES RANGING BETWEEN 275°-300°F.
2. MINIMUM ASPHALT THICKNESS FOR PEDESTRIAN ONLY PATHWAYS SHALL BE 2". MINIMUM ASPHALT THICKNESS FOR PARKING LOTS, DRIVEWAYS AND PATHWAYS THAT ACCOMMODATE VEHICULAR TRAFFIC SHALL BE 4".
3. BASE COURSE MATERIAL SHALL MEET WSDOT 2-09.3(1)E STANDARDS.
4. ALL SAW CUTS MADE FOR REPAIRS/PATCHING SHALL BE VERTICAL AND IN STRAIGHT LINES. TACK ASPHALT FACES OF SAW CUTS AND SEAL ALL JOINTS WITH PG 64-22 OIL OR APPROVED EQUAL.



City of
Bellevue

TITLE:

TYPICAL ASPHALT PAVEMENT SECTIONS

DRAWING #:	PK-HS-01
SCALE:	N.T.S.
REVISION DATE:	12-2018
DEPARTMENT:	PARKS