



RPM TYPE 2 YELLOW, STIMSONITE 953:
 USE 12 FOR ≤ 15' DIA.
 USE 16 FOR < 20' DIA.
 USE 20 FOR ≥ 20' DIA.



18" X 18" YELLOW HIGH INTENSITY TYPE 1 OBJECT MARKER PLACED IN TRAFFIC CIRCLE FOR EACH APPROACH. ALL SIGNS TO BE MOUNTED ON SINGLE POST. LOCATION TO BE DETERMINED BY ENGINEER. SIGN HEIGHT: 5' FROM BOTTOM OF LOWER SIGN TO BARK MULCH.




30" X 30" BLACK ON YELLOW PLACED 75' TO 100' BACK FROM TRAFFIC CIRCLE ON EACH APPROACH. SEE STD. DWG. SG-100-1 FOR POST TYPE AND INSTALLATION.

SIGNING

BACKFILL WITH TOPSOIL AND MULCH

CAST-IN-PLACE CEMENT CONCRETE MOUNTABLE CURB


2" DEPTH CONTROL JOINTS. FILL WITH SEALANT, COLOR GRAY, AS PER 9-04.2 OF THE WSDOT STANDARD SPECIFICATIONS:
 4 JOINTS FOR < 20' DIA.
 8 JOINTS FOR > 20' DIA.

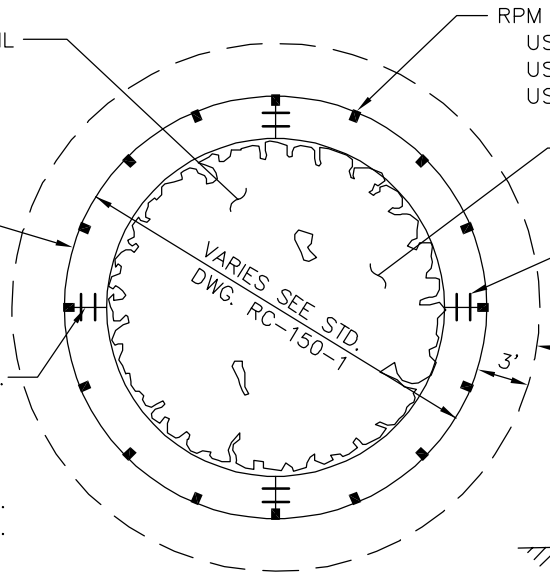


TYPICAL TRAFFIC CIRCLE

ADJUST MANHOLES, VALVE BOXES, AND MONUMENT CASES TO NEW GRADE.

USE 2-#4 EPOXY COATED REBAR, 12" LENGTH, AT EACH JOINT. (TYP.)

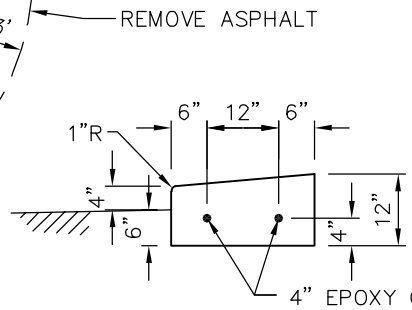

CURB DETAIL

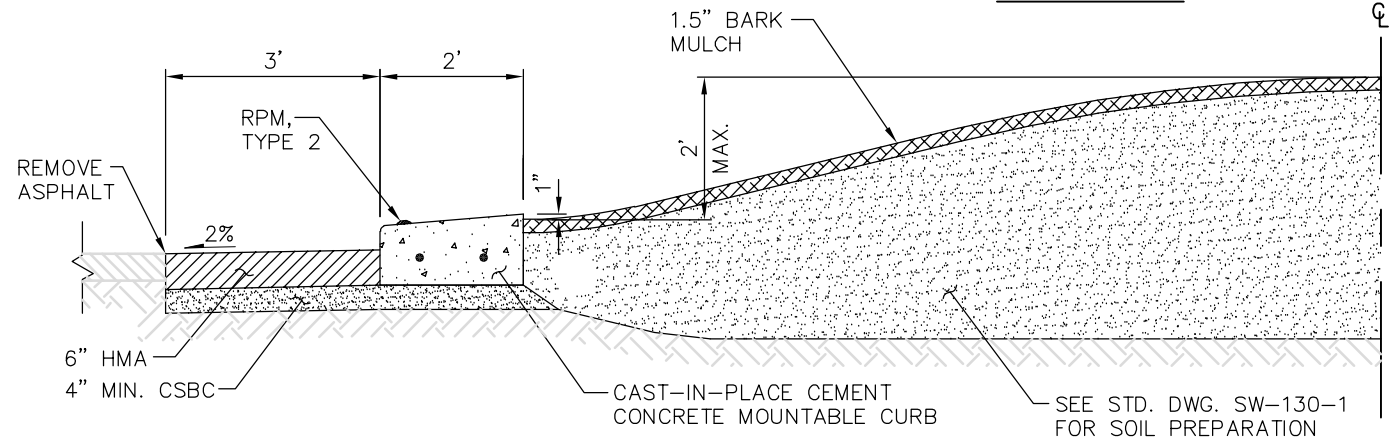

TYPICAL SECTION

NOTES:

1. LANDSCAPING TO BE DETERMINED BY TRANSPORTATION/PARKS STAFF.
2. MONUMENT PROTECTION/PRESERVATION: NOTIFY C.O.B. SURVEYING PRIOR TO MONUMENT ADJUSTMENT. RAISE MONUMENT TO GRADE IN APPROPRIATE CASING.
3. CONCRETE SHALL BE AIR ENTRAINED CLASS 4000 PER SECTION 6-02 OF WSDOT STANDARD SPECIFICATIONS.



City of Bellevue

TRAFFIC CIRCLE DETAILS

DRAWING NUMBER	RC-140-1
SCALE	NONE
REVISION DATE	12/22
DEPARTMENT	TRANS