


BUFFERED BICYCLE LANE

DRIVEWAY

NOTES:

1. MINIMUM BIKE LANE WIDTH IS 5 FEET, NOT INCLUDING GUTTER.
2. 40' TYPICAL (ADJUST AS NECESSARY FOR VEHICLE TRACKING.)
3. SEE STD. DWG. CH-110-1 FOR BICYCLE CROSSING MARKINGS.
4. CONSIDER THE USE OF TWO-STAGE TURN BOXES AT MULTI-LANE OR HIGHER SPEED SIGNALIZED INTERSECTIONS. CONTACT THE REVIEW ENGINEER FOR SITE SPECIFIC REQUIREMENTS. INTERSECTION OPERATION ANALYSIS REQUIRED.
5. BUFFERED BIKE LANE SHALL BE EVALUATED AND IMPLEMENTED WHERE SPACE IS AVAILABLE.

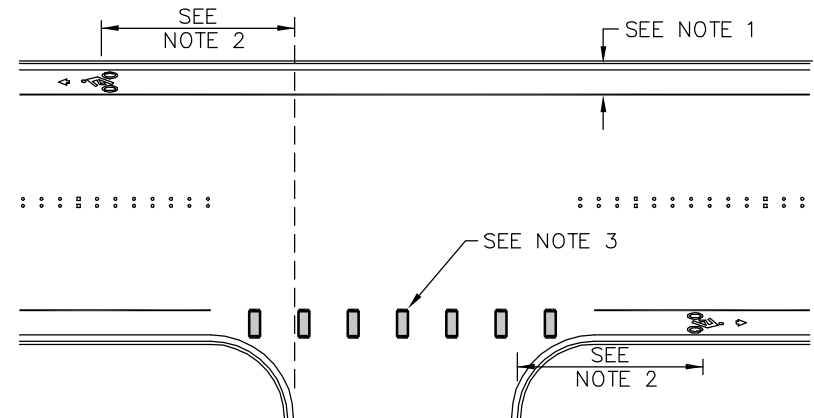

SIDE STREET TREATMENT



STRIPED BICYCLE LANE CHANNELIZATION

DRAWING NUMBER	CH-241-1
SCALE	NONE
REVISION DATE	2/24
DEPARTMENT	TRANS