



## NOTES:


- 1. RAISED CROSSWALK CHEVRON MARKING SHALL BE THERMOPLASTIC, HEAT FUSED PREFORMED, 90 MIL., OR EQUAL APPROVED BY THE ENGINEER.
- 2. CHEVRON TO BE CENTERED IN THE DRIVING LANE. LOCATION SHALL BE VERIFIED BY THE ENGINEER PRIOR TO INSTALLATION.
- 3. RAISED CROSSWALK SHALL BE CONSTRUCTED ON TOP OF NEW OR EXISTING WEARING COURSE USING CITY PROVIDED TEMPLATE, 48 HOURS NOTICE REQUIRED.



## MARKING DETAIL

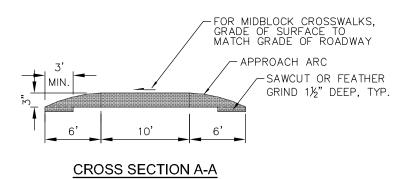

## APPROACH ARC DETAIL

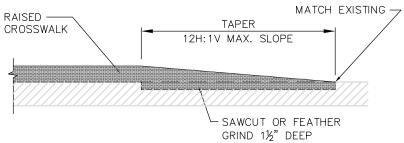

LONGITUDINAL SECTION - RAISED CROSSWALK
AT ASPHALT SHOULDER



RAISED CROSSWALK

|  | DRAWING NUMBER | CW-120-1 |
|--|----------------|----------|
|  | SCALE          | NONE     |
|  | REVISION DATE  | 2/24     |
|  | DEPARTMENT     | TRANS    |