


ROCK-LINED SHOULDER DITCH  
IN FILL SECTION

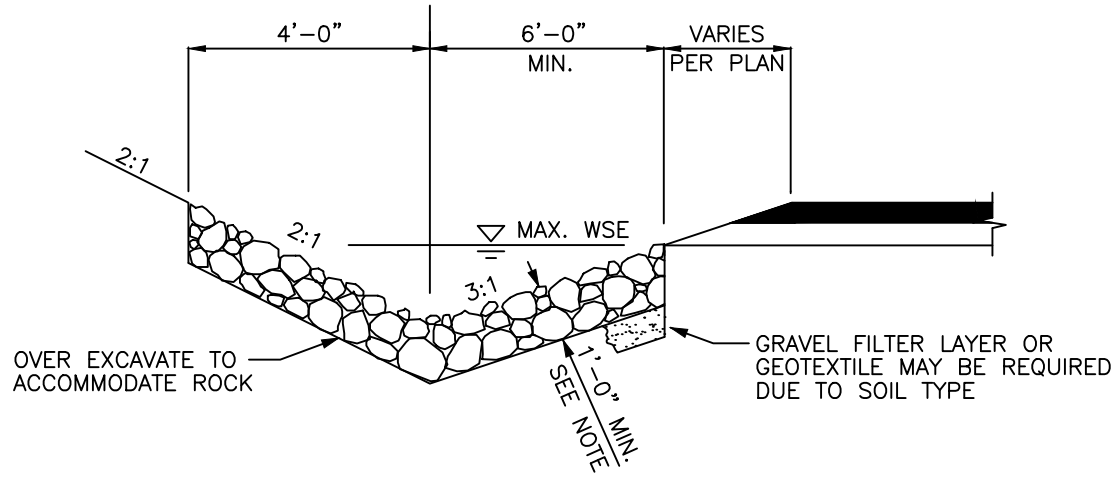

ROCK-LINED SHOULDER DITCH  
IN CUT SECTION

NOTES:

1. ROCK LINED DITCHES TO BE USED WHEN FLOW VELOCITIES EXCEED 4 FPS.
2. ROCK SIZE AND DEPTH DEPENDENT ON FLOW VELOCITY. MINIMUM ROCK SIZE 2"-4" QUARRY SPALLS.

	<h1 style="margin: 0;">City of Bellevue</h1>	<p>STORM AND SURFACE WATER UTILITY</p>
---	--	--

TITLE

ROCK-LINED DITCHES