



CIRCULAR TURNAROUND

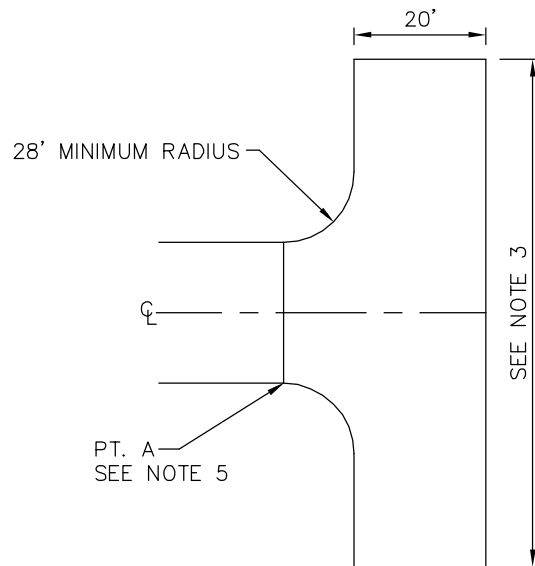

HAMMERHEAD

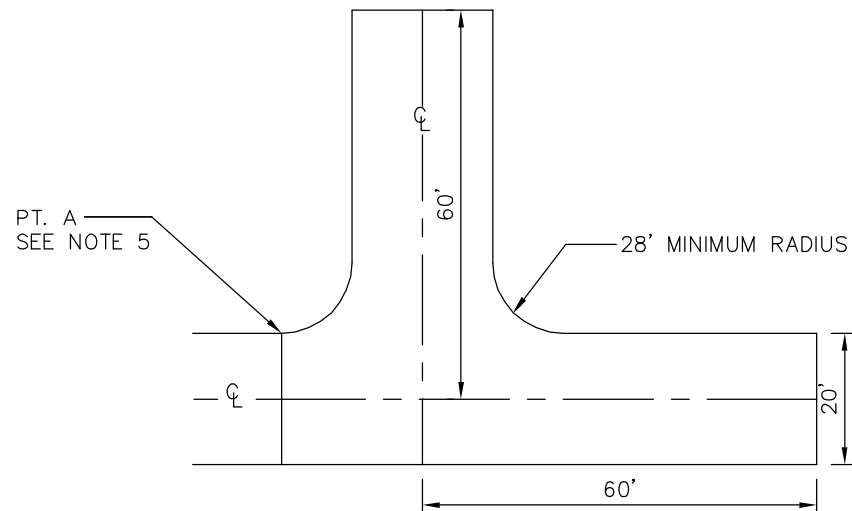

OFFSET HAMMERHEAD

NOTES:

1. LANDSCAPED ISLAND WITH VERTICAL CURB AT CENTER OF CIRCULAR TURNAROUND IF REQUIRED.
2. CIRCULAR TURNAROUNDS SHALL BE PLACED WITHIN A 50' MINIMUM RIGHT-OF-WAY RADIUS. SIDEWALKS AND UTILITIES MAY BE PLACED WITHIN A PUBLIC EASEMENT AT THE DISCRETION OF THE REVIEW ENGINEER.
3. HAMMERHEAD WIDTH MAY RANGE FROM 90' TO 120' DEPENDING UPON ROAD LENGTH. A WIDTH LESS THAN 120' IS ALLOWED ONLY IF ALL HOMES SERVED BY THE HAMMERHEAD ARE SPRINKLERED.
4. TURNAROUND FACILITIES CANNOT BE LOCATED ON DRIVEWAYS.
5. POINT A (LOCATED AT THE START OF RADIUS) REPRESENTS THE MEASURED END OF THE STREET/ROAD LENGTH AS REFERENCED IN BCC 14.60.170 (STREET ENDS).
6. ALL STREET ENDS SHALL BE SIGNED PER THE MUTCD.
7. CIRCULAR TURNAROUND SHALL BE USED FOR PUBLIC STREETS.



TURNAROUND FACILITIES

DRAWING NUMBER	RC-130-1
SCALE	NONE
REVISION DATE	2/24
DEPARTMENT	TRANS