



REDUCED SECTION A-A
(SEE NOTE 5)

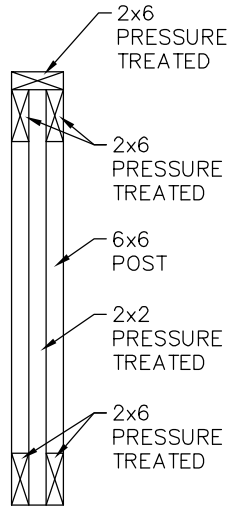

SECTION A-A

NOTES:

1. USE ON TRAILS OR TO UPGRADE EXISTING WOOD RAILING.
2. FOR NEW INSTALLATIONS IN SIDEWALK, METAL RAILING IS PREFERRED (SEE STD. DWG. RS-110-1 AND RS-120-1).
3. AVOID PLACING IN SIGHT LINES (SEE STD. DWGS. RL-100-1, RL-110-1, AND RL-120-1).
4. 42" HEIGHT MAY BE USED ONLY UPON APPROVAL OF THE ENGINEER.
5. USE REDUCED CROSS SECTION ONLY UPON APPROVAL OF THE ENGINEER.
6. NAILING – TWO NAILS PER JOINT MINIMUM, WITH PENETRATION TO ADEQUATELY SECURE THE JOINT. NAILS MUST BE GALVANIZED.
9. SEE SECTION 3.4.1.2 OF THE DESIGN MANUAL FOR ADDITIONAL INFORMATION.

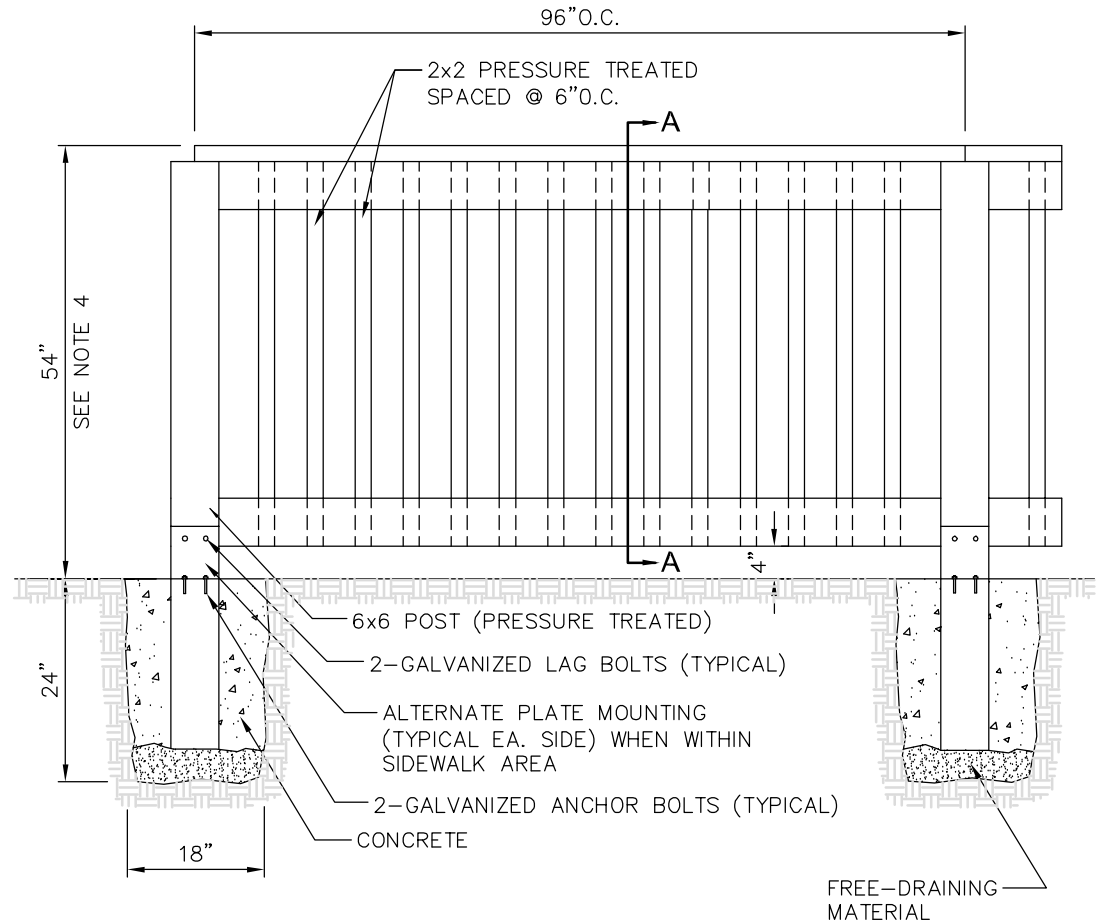

ELEVATION VIEW



WOOD SAFETY RAILING

DRAWING NUMBER	RS-130-1
SCALE	NONE
REVISION DATE	2/24
DEPARTMENT	TRANS