



DRIVEWAY APPROACH DETAIL

NOTES:

1. SEE SECTION 3.5 OF THE DESIGN MANUAL FOR DRIVEWAY WIDTH, DESIGN DETAILS, AND GRADING REQUIREMENTS.
2. AT SAWCUT, TACK COAT EXISTING SURFACES WITH CSS-1 AND SEAL IN ACCORDANCE WITH WSDOT STD. SPEC. SECTION 5-03.
3. DRIVEWAY APPROACH TO BE 6" TO 8" CLASS 4000 P.C.C. MIX WITH COMPRESSIVE STRENGTH OF 3000 PSI WITHIN 3 DAYS, FOR MINIMUM 5' BEHIND CURB.
4. HOT MIX ASPHALT OR CONCRETE TO BE PLACED OVER COMPACTED SUBGRADE AND 4" OF CSBC COMPACTED TO 95%.
5. EDGE DIMENSION D:
 COMMERCIAL 15'
 RESIDENTIAL, ARTERIAL STREET 10'
 RESIDENTIAL, LOCAL STREET 5'
6. CONCRETE DRIVEWAY APPROACH AND CONCRETE DRIVEWAY IN THE RIGHT-OF-WAY SHALL NOT CONTAIN REINFORCING STEEL.
7. CONCRETE DRIVEWAY APPROACH AND CONCRETE DRIVEWAY IN THE RIGHT-OF-WAY FINISH SHALL BE BRUSHED WITH STIFF BRISTLED BRUSH PARALLEL TO THE CURB.

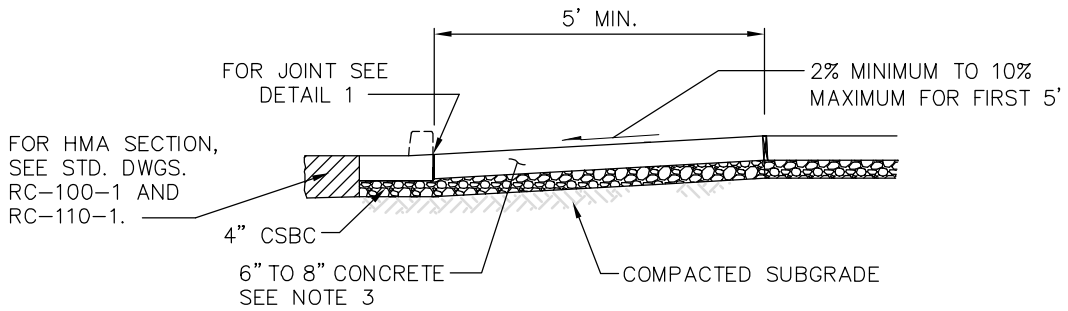

SECTION A-A

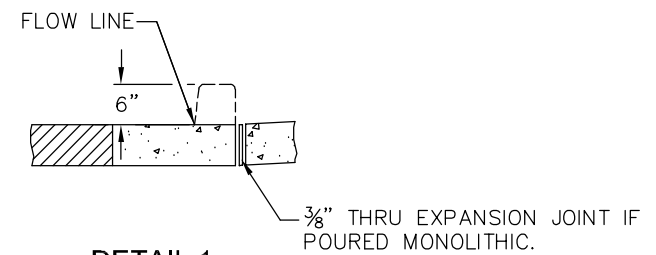

DETAIL 1



City of Bellevue

**CONCRETE DRIVEWAY APPROACH
WHERE CURB-GUTTER EXISTS (NO SIDEWALK)**

DRAWING NUMBER	SW-181-1
SCALE	NONE
REVISION DATE	2/24
DEPARTMENT	TRANS