


NOTES:

1. SEE CONTRACT PLANS AND SPECIFICATIONS FOR POLE HEIGHT, SIGN SIZES, SHEETING TYPE, AND OTHER DETAILS.
2. REFER TO THE CURRENT BELLEVUE SPECIAL PROVISIONS FOR APPROVED RRFB COMPONENTS.
3. THE PREFERRED PLACEMENT OF RRFB CONTROLLER CABINET HOUSING THE RRFB CONTROLLER IS BEHIND THE W11-2 SIGN. CONTACT THE CITY'S TRAFFIC ENGINEER FOR CONTROLLER PLACEMENT WHEN USING DUAL SIDED SIGN ASSEMBLIES.
4. POLE, POLE BASE, POLE CAP, SIGN BACKS, BANDING, AND CONTROLLER CABINET SHALL BE POWDER COATED BLACK (RAL 9004 OR P33) UNLESS OTHERWISE NOTED ON THE PLANS.
5. FOR SCHOOL CROSSINGS, A S1-1 SHALL BE USED.
6. THE RRFB BASE AND FOUNDATION SHALL BE LOCATED SO THAT 4' MINIMUM CLEARANCE IS MAINTAINED FOR THE PEDESTRIAN ACCESS ROUTE.
7. "TINY" SERVICE CABINET SHALL BE USED WITH RRFB ASSEMBLY UNLESS OTHERWISE REQUIRED BY REVIEW ENGINEER. SEE STD. DWG. SL-221-1.

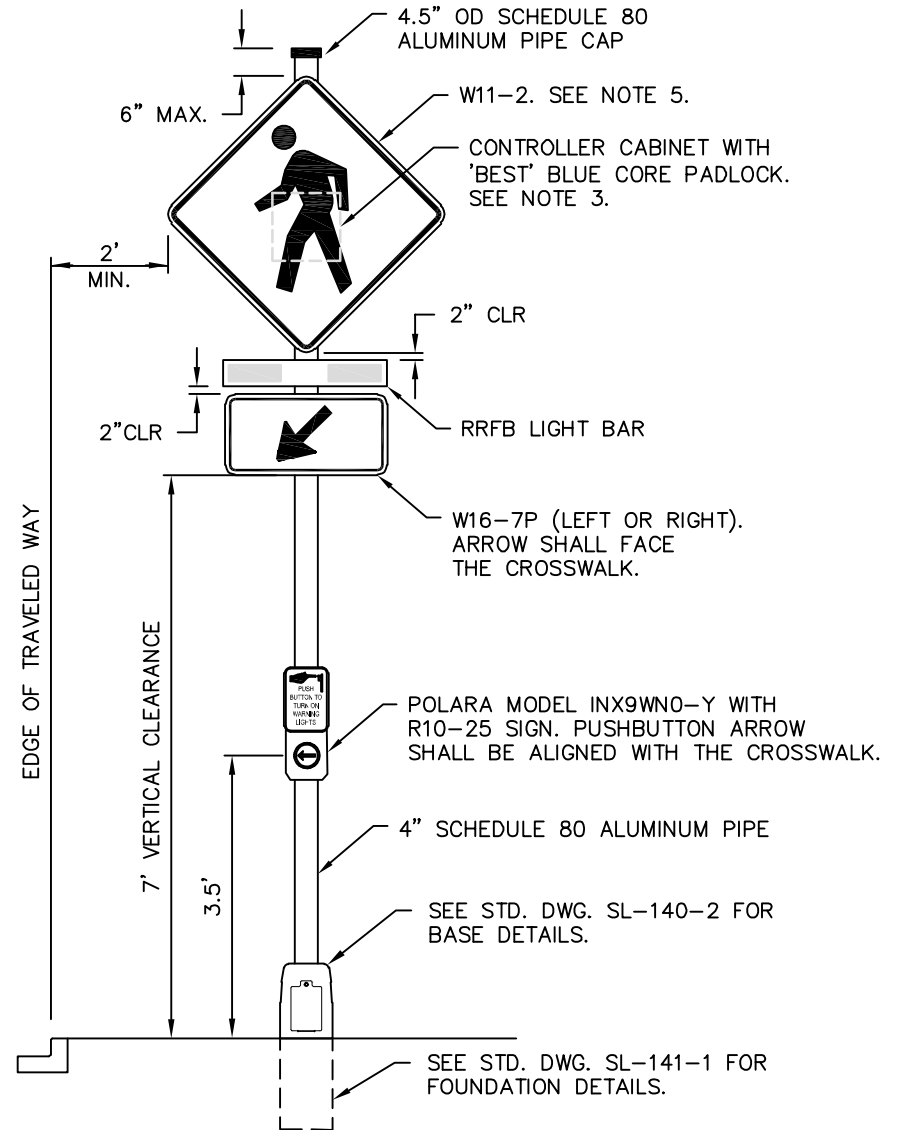

TYPICAL RRFB ASSEMBLY

DRAWING NUMBER	SL-150-1
SCALE	NONE
REVISION DATE	1/25
DEPARTMENT	TRANS