


NOTES:

1. SEE CONTRACT PLANS AND SPECIFICATIONS FOR POLE HEIGHT, SIGN SIZES, SHEETING TYPE, SPEED LIMIT, AND OTHER DETAILS.
2. THE LEGEND "YOUR SPEED" SHALL BE A BLACK LEGEND ON A YELLOW RETROREFLECTIVE BACKGROUND.
3. THE CHANGEABLE LEGEND DISPLAYING THE SPEED OF THE APPROACHING VEHICLE SHALL BE A YELLOW LUMINOUS LEGEND ON A BLACK OPAQUE BACKGROUND. THE VEHICLE SPEED DISPLAYED ON THE CHANGEABLE PORTION OF THE SIGN SHALL BE DISPLAYED AS AN INTEGER.
4. REFER TO THE CURRENT BELLEVUE SPECIAL PROVISIONS FOR APPROVED RADAR FEEDBACK SIGN COMPONENTS.
5. POLE, POLE BASE, POLE CAP, SIGN BACKS, BANDING, AND CONTROLLER CABINET SHALL BE POWDER COATED "BLACK" (RAL9004 OR APPROVED EQUAL) UNLESS OTHERWISE NOTED ON THE PLANS.
6. THE RADAR FEEDBACK SIGN BASE AND FOUNDATION SHALL BE LOCATED SO THAT 4' MINIMUM CLEARANCE IS MAINTAINED FOR THE PEDESTRIAN ACCESS ROUTE.
7. WHEN USED TO SUPPLEMENT A HORIZONTAL ALIGNMENT WARNING SIGN ADVISORY SPEED, THE FEEDBACK SIGN SHALL BE AN INDEPENDENT INSTALLATION PLACED DOWNSTREAM OF THE WARNING SIGN NEAR THE POINT OF CURVATURE OF THE HORIZONTAL CURVE.

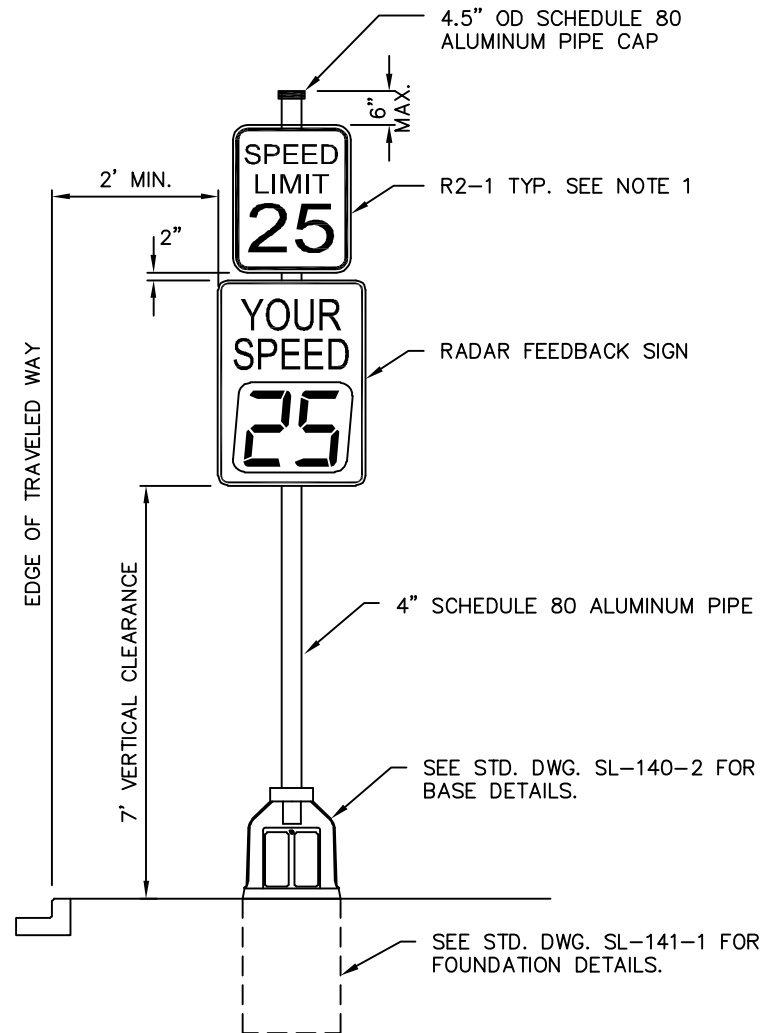

TYPICAL RADAR FEEDBACK SIGN ASSEMBLY

DRAWING NUMBER	SL-152-1
SCALE	NONE
REVISION DATE	1/25
DEPARTMENT	TRANS