


FOR MAINTENANCE OR EXTENSION OF EXISTING CURB ONLY. NOT FOR NEW INSTALLATIONS.
(FOR NEW INSTALLATIONS SEE STD. DWGS. CH–150–1 AND CH–160–1)

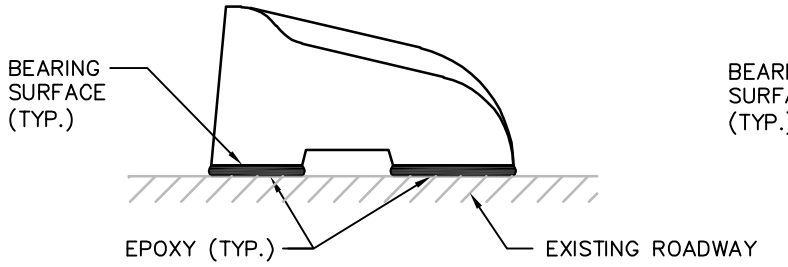


SECTION - TYPE A CURB

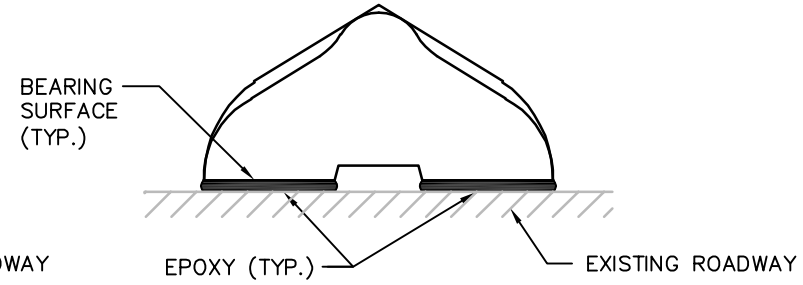


SECTION - TYPE C CURB

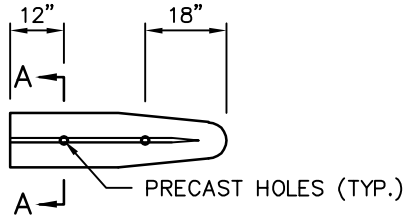


TYPE C NOSING

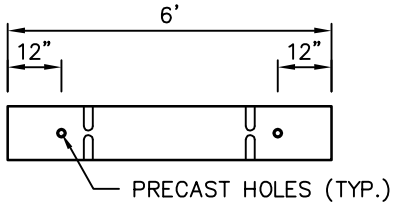

TYPE C OR TYPE A CONNECTING DIVIDER

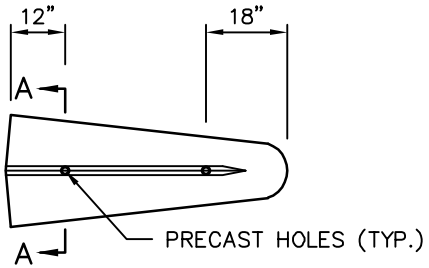

TYPE A NOSING

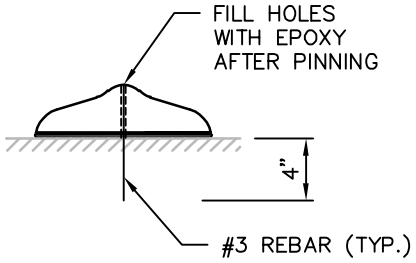

SECTION A-A

NOTES:

1. NOSING AND NEXT TWO SECTIONS OF CURB SHALL HAVE HOLES PRECAST AS SHOWN.
2. PRECAST TRAFFIC CURB SHALL BE INSTALLED WITH AN EAS–06 OR EAS–08 TWO PART EPOXY OR ULTRABOND 1 FROM ADHESIVES TECHNOLOGY CORP. SEE STD. DWG. CH–300–1.
3. EPOXY SHALL BE PLACED UNDER THE BEARING SURFACE OF THE PRECAST TRAFFIC CURB.
4. SUFFICIENT EPOXY SHALL BE APPLIED TO ENSURE SQUEEZE–OUT OF 50% PER EACH SIDE OF EACH CURB SECTION.

City of Bellevue

PRECAST TRAFFIC CURB INSTALLATION FOR MAINTENANCE OF EXISTING CURB

DRAWING NUMBER	CH–140–1
SCALE	NONE
REVISION DATE	10/26
DEPARTMENT	TRANS