


STAMPED RING TEMPLATE A



STAMPED RING TEMPLATE B

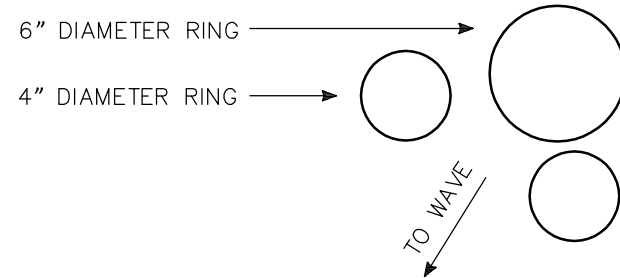

STAMPED RING TEMPLATE C

NOTES:

1. STAMPED TEMPLATE SHALL BE PLACED BETWEEN ONE AND TWO FEET FROM WAVE. FOR APPROXIMATE LOCATION SEE STD. DWGS. BR-140-1 AND BR-150-1. LOCATION OF STAMP SHOULD BE OUTSIDE OF THE WHEEL PATH.
2. THICKNESS OF STAMPED RING SHALL NOT EXCEED  $\frac{1}{4}$ ". DEPTH OF STAMPED RING SHALL NOT EXCEED  $\frac{1}{4}$ " INTO CONCRETE.
3. STAMPED RING LOCATION TO BE DETERMINED BY THE ENGINEER.



CROSSWALK WAVE – STAMPED RING TEMPLATES

DRAWING NUMBER	BR-160-1
SCALE	NONE
REVISION DATE	12/17
DEPARTMENT	TRANS