
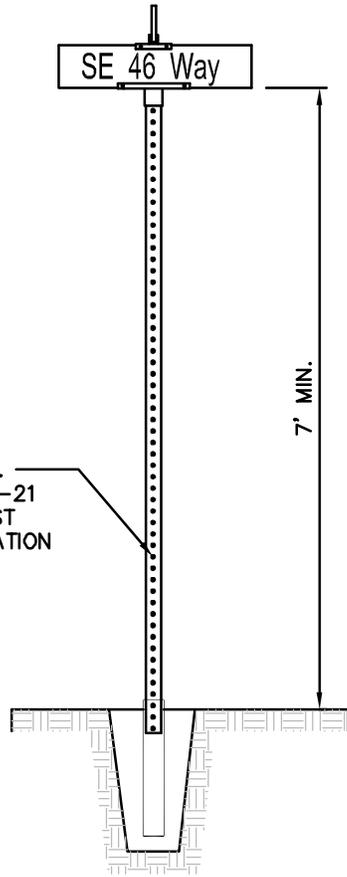



ABBREVIATIONS:

STREET = St
 AVENUE = Ave
 PLACE = Pl
 WAY = Way OR Wy
 BOULEVARD = Blvd
 PARKWAY = Pkwy
 LANE = Ln
 COURT = Ct
 DRIVE = Dr
 ROAD = Rd
 KEY = Key
 CONNECTOR = Conn
 CIRCLE = Cir
 TERRACE = Ter

30" TYP.

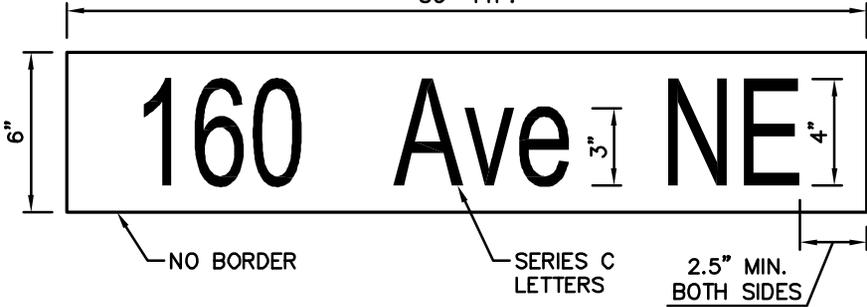

TYPICAL INSTALLATION

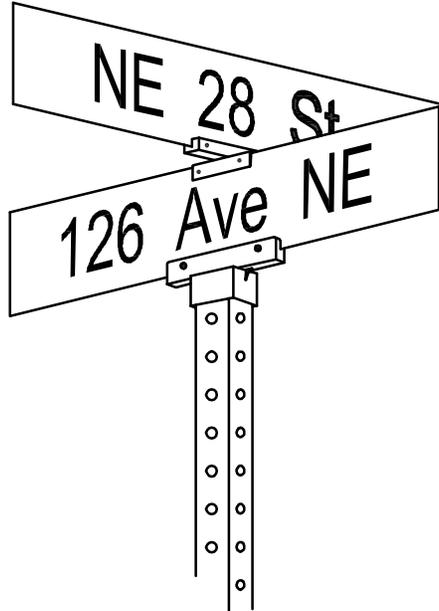

NOTES:

1. SIGNING MATERIAL AND FABRICATION SHALL BE IN ACCORDANCE WITH SECTION 9-28 OF THE WSDOT STANDARD SPECIFICATIONS, CURRENT EDITION.
2. TYPE 1 SIGNS SHALL BE WHITE LETTERING ON GREEN BACKGROUND, NO BORDER, DOUBLE-SIDED.
3. SIGN BLADE SHALL BE 6" EXTRUDED ALUMINUM, TREATED, 0.080 GAUGE, EXCEPT 9" BLADE SHALL BE USED FOR STREET NAMES CONTAINING LOWER CASE LETTERS WITH DESCENDING STEMS OR TAILS (E.G., "g", "p", "y").
4. SIGN SHEETING SHALL BE 3M DIAMOND GRADE DG3 REFLECTIVE SHEETING SERIES 4000.
5. LETTERING SHALL BE FORMED USING 3M ELECTROCUT (EC) FILM SERIES 1170.
6. FONT SHALL BE HIGHWAY GOTHIC SERIES C, 4" UPPER AND LOWER CASE.
7. POSTS SHALL BE 2"x2" SQUARE STEEL POSTS AS PER STD DWG TE-21.
8. MOUNTING HARDWARE SHALL BE ZUMAR Z12RDSQ200EX CAP AND ZUMAR 812EX90X CROSSPIECE, OR APPROVED EQUAL.
9. LAYOUT OF NON-NUMBERED STREET NAME LETTERING (E.G., Newport Key, Vineyard Crest) WILL BE PROVIDED BY THE ENGINEER.



**STREET NAME SIGN – TYPE 1
 NON-ARTERIAL STREET**

DRAWING NUMBER	TE-22A
SCALE	NONE
REVISION DATE	01/14
DEPARTMENT	TRANS