


**RESTORATION LIMITS (0-2 YEARS FOLLOWING PAVEMENT OVERLAY OR NEW STREET CONSTRUCTION)**

NTS

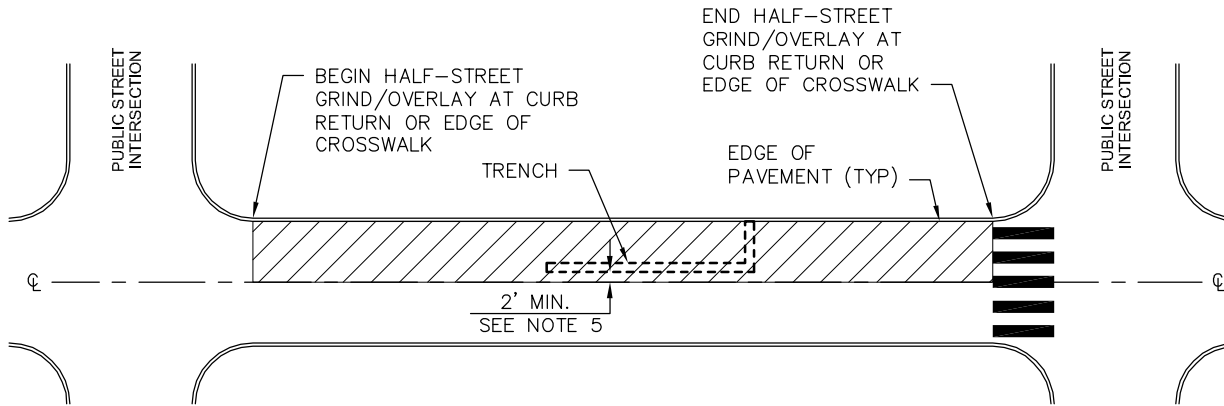

**RESTORATION LIMITS (2-5 YEARS FOLLOWING PAVEMENT OVERLAY OR NEW STREET CONSTRUCTION)**

NTS

**NOTES:**

1. A FIVE-YEAR MORATORIUM ON PAVEMENT TRENCHING IS EFFECTIVE UPON COMPLETION OF NEW STREET CONSTRUCTION AND UPON PAVEMENT OVERLAY OF AN EXISTING STREET. SEE BELLEVUE CITY CODE 14.60.250.
2. THIS STANDARD APPLIES TO ALL CUTS IN PAVEMENT DESIGNATED "NO CUT" ON THE CURRENT TRENCH RESTORATION MAP.
3. GRIND/OVERLAY DEPTH SHALL BE 2.0 INCHES UNLESS OTHERWISE SPECIFIED BY THE CITY OF BELLEVUE.
4. ALL UTILITY CASTINGS SHALL BE ADJUSTED TO FINISHED GRADE AFTER OVERLAY AND CHANNELIZATION AND TRAFFIC SIGNAL INDUCTION LOOPS SHALL BE RESTORED.
5. IF EDGE OF TRENCH IS LESS THAN 2 FEET FROM THE ROADWAY CENTERLINE OR CROWN, A FULL WIDTH OVERLAY WILL BE REQUIRED.



**ASPHALT OVERLAY FOR TRENCH RESTORATION ON 'NO CUT' ROADWAYS**

DRAWING NUMBER	RC-201-1
SCALE	NONE
REVISION DATE	2/24
DEPARTMENT	TRANS