
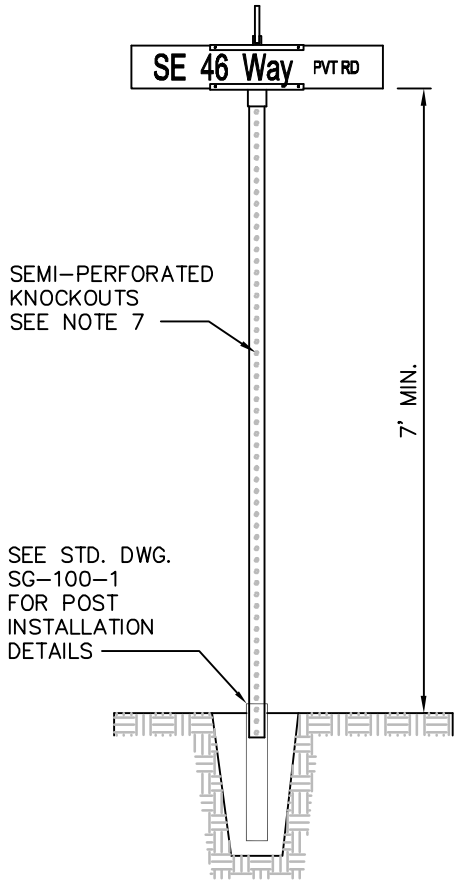


TYPICAL INSTALLATION


ABBREVIATIONS:

STREET =	St
AVENUE =	Ave
PLACE =	Pl
WAY =	Way OR Wy
BOULEVARD =	Blvd
PARKWAY =	Pkwy
LANE =	Ln
COURT =	Ct
DRIVE =	Dr
ROAD =	Rd
KEY =	Key
CONNECTOR =	Conn
CIRCLE =	Cir
TERRACE =	Ter

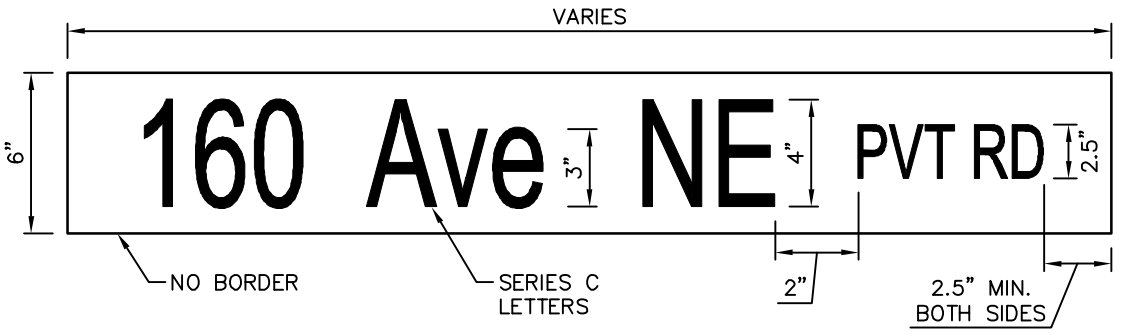

159 Pl SE PVT RD

SE 23 Ln PVT RD

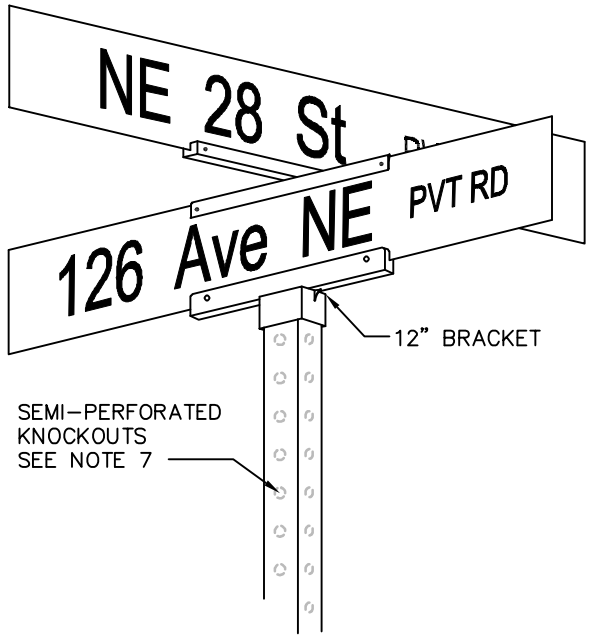

NOTES:

1. SIGNING MATERIAL AND FABRICATION SHALL BE IN ACCORDANCE WITH SECTION 9–28 OF THE WSDOT STANDARD SPECIFICATIONS, CURRENT EDITION.
2. TYPE 1 SIGNS SHALL BE WHITE LETTERING ON GREEN BACKGROUND, NO BORDER, DOUBLE–SIDED.
3. SIGN BLADE SHALL BE 6" EXTRUDED ALUMINUM, TREATED.
4. SIGN SHEETING SHALL BE 3M DIAMOND GRADE DG3 REFLECTIVE SHEETING SERIES 4000.
5. LETTERING SHALL BE FORMED USING 3M ELECTROCUT (EC) FILM SERIES 1170.
6. FONT SHALL BE HIGHWAY GOTHIC SERIES C, 4" UPPER AND LOWER CASE.
7. SIGN POST SHALL BE 2"X2" SQUARE STEEL POSTS, MINIMUM 14 GAUGE, WITH 7/16" SEMI–PERFORATED KNOCKOUTS ON 1" CENTERS FULL LENGTH FOUR SIDES. AS PER STD DWG SG–100–1.
8. MOUNTING HARDWARE SHALL BE ZUMAR 812EX2SQ CAP AND ZUMAR Z12CPEX CROSSPIECE, OR APPROVED EQUAL.

City of Bellevue

STREET NAME SIGN (PRIVATE ROAD) – TYPE 1
NON–ARTERIAL STREET

DRAWING NUMBER	SG–140–1
SCALE	NONE
REVISION DATE	10/26
DEPARTMENT	TRANS