


NOTES:

1. SIGNING MATERIAL AND FABRICATION SHALL BE IN ACCORDANCE WITH SECTION 9-28 OF THE WSDOT STANDARD SPECIFICATIONS, CURRENT EDITION.
2. TYPE 2 SIGNS SHALL BE WHITE LETTERING ON GREEN BACKGROUND, 1/2" WHITE BORDER, NO MARGIN, DOUBLE-SIDED.
3. SIGN BLADE SHALL BE 9" EXTRUDED ALUMINUM, TREATED.
4. SIGN SHEETING SHALL BE 3M DIAMOND GRADE DG3 REFLECTIVE SHEETING SERIES 4000.
5. LETTERING SHALL BE FORMED USING 3M ELECTROCUT (EC) FILM SERIES 1170.
6. FONT SHALL BE HIGHWAY GOTHIC SERIES C, 6" UPPER AND LOWER CASE.
7. POSTS SHALL BE 2"x2" SQUARE STEEL POSTS AS PER STD DWG SG-100-1.
8. MOUNTING HARDWARE SHALL BE ZUMAR Z12RDSQ200EX CAP AND ZUMAR 812EX90X CROSSPIECE, OR APPROVED EQUAL.

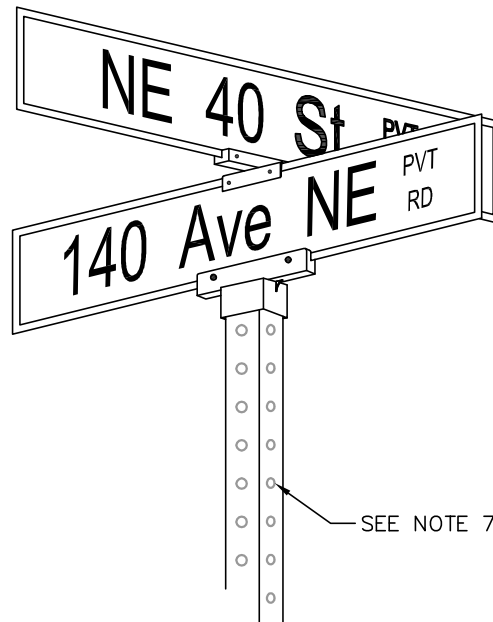

ABBREVIATIONS:

- STREET = St
- AVENUE = Ave
- PLACE = Pl
- WAY = Way OR Wy
- BOULEVARD = Blvd
- PARKWAY = Pkwy
- LANE = Ln
- COURT = Ct
- DRIVE = Dr
- ROAD = Rd
- KEY = Key
- CONNECTOR = Conn
- CIRCLE = Cir
- TERRACE = Ter



**STREET NAME SIGN (PRIVATE ROAD) – TYPE 2
ARTERIAL STREET**

| | |
|----------------|----------|
| DRAWING NUMBER | SG-160-1 |
| SCALE | NONE |
| REVISION DATE | 12/16 |
| DEPARTMENT | TRANS |